





Swift Group Technical Handbook

Coach built Motorhomes

Contents

Edge	
Edge Specifications	4
Edge Capacities	9
Edge Towing Capabilities	10
Edge Jacking	11
Select Compact & Escape	
Select Compact Specifications	12
Escape Specifications	
Select Compact & Escape Capacities	21
Select Compact & Escape Towing Capabilities	22
Select Compact & Escape Jacking	
Dealer Special Editions based on Escape	46
Kon-Tiki	
Kon-Tiki Specifications	26
Kon-Tiki Capacities	33
Kon-Tiki Towing Capabilities	34
Kon-Tiki Jacking	35
Dealer Special Editions based on Kon-Tiki	56
Wiring Diagrams	36
Bulb Replacement	45
Bed Make Up	
Edge bed make up	60
Select Compact bed make up	63
Escape and Kon-Tiki bed make up	64

Model	Edge 464	Standard	Edge 464	6 Optional	
Roof Profile		LowLine			
Engine	120 MJT	/ 140 MJT	140 MJT Auto		
Engine Capacity		2.21	tr		
Max Power	120 hp @ 3500 rpm	/140 HP @ 3500rpm	140 HP@	3500rpm	
Torque	320 Nm @ 1400 rpm	/350 Nm @ 1400rpm	380 Nm @	9 1400rpm	
Chassis		MLWB Fiat	t Chassis		
Wheel base		3.80m/	12'6"		
Designated Passenger Seats (excluding Driver)		3			
Berths (sleeping positions)		4			
Overall Length (no ladder)		6.75m /	22'2"		
Overall Width (mirrors folded)		2.39m / 7'10"			
Overall Height		2.91m	/ 9'6"		
Maximum Technical Permissible Laden Mass (A)	3500kg	3650kg	3500kg	3650kg	
Mass in Running Order (B)	2850kg	2850kg	2883kg	2883kg	
Maximum User Payload (A-B)	650kg	650kg	617kg	767kg	
Unladen Weight	2720kg	2720kg	2753kg	2753kg	
Essential Habitation Equipment		0kg	g		
Thermal Insulation Grade		THR	EE		
Bed Sizes					
Front Double		215cm x 123cm / 92c	cm / 7'1" x 4'0" / 3'0"		
Rear Double		188cm x 133cr	n / 6′2″ x 4′4″		
Rear Nearside Single					
Rear Offside Single					
Rear Bunk (Upper)					
Rear Bunk (Lower)					
Overcab bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Edge 466 Standard	Edge 466 Optional
Roof Profile	High Lin	ne
Engine	120 MJT / 140 MJT	140 MJT Auto
Engine Capacity	2.2ltr	
Max Power	120 hp @ 3500 rpm /140 HP @ 3500rpm	140 HP @ 3500rpm
Torque	320 Nm@1400 rpm/350 Nm@1400rpm	380 Nm @ 1400rpm
Chassis	LWB Fiat Ch	nassis
Wheel base	4.04m / 13	3′ 3″
Designated Passenger Seats (excluding Driver)	5	
Berths (sleeping positions)	6	
Overall Length (no ladder)	7.32m / 2 ⁴	4'0"
Overall Width (mirrors folded)	2.39m / 7'	10"
Overall Height	2.98m/9	'9"
Maximum Technical Permissible Laden Mass (A)	3650kg]
Mass in Running Order (B)	3016kg Est	3049kg Est
Maximum User Payload (A-B)	634kg Est	601kg Est
Unladen Weight	2886kg Est	2919kg Est
Essential Habitation Equipment	0kg	
Thermal Insulation Grade	THREE	
Bed Sizes		
Front Double	215cm x 180cm x 121cm	/ 7'1" x 5'11" x 4'0"
Rear Double		
Rear Nearside Single		
Rear Offside Single		
Rear Bunk (Upper)	204cm x 85cm /	6'8" x 2'9"
Rear Bunk (Lower)	204cm x 85cm /	6'8" x 2'9"
Overcab bed	190cm x 134cm /	/ 6'3" x 4'5"

NOTE: 1. The Maximum User Payload includes:

- a) the **conventional load** (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAWAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Edge 476	Standard	Edge 476 Optional		
Roof Profile		High Line			
Engine	120 MJT	/ 140 MJT	140 MJT Auto		
Engine Capacity		2.2	ltr		
Max Power	120 hp @ 3500 rpm	/ 140 HP @ 3500rpm	140 HP @ 3500rpm		
Torque	320 Nm@1400 rpm	/ 350 Nm @ 1400rpm	380 Nm @ 1400rpm		
Chassis		LWB Fiat	Chassis		
Wheel base		4.04m	/ 13′ 3″		
Designated Passenger Seats (excluding Driver)		5	i		
Berths (sleeping positions)		6			
Overall Length (no ladder)		7.32m	/ 24'0"		
Overall Width (mirrors folded)		2.39m	/ 7'10"		
Overall Height		2.98m	/ 9'9"		
Maximum Technical Permissible Laden Mass (A)	3500kg	3650kg	3650kg		
Mass in Running Order (B)	2991kg	2991kg	3024kg		
Maximum User Payload (A-B)	509kg	659kg	626kg		
Unladen Weight	2861kg	2861kg	2894kg		
Essential Habitation Equipment		Ok	kg		
Thermal Insulation Grade		THE	REE		
Bed Sizes					
Front Double		215cm x 180cm / 86c	m / 7'1" x 5'11" / 2'10"		
Rear Double		214cm x 143c	m / 7'0" x 4'8"		
Rear Nearside Single		191cm x 83cm / 6′3″ x 2′5″			
Rear Offside Single		191cm x 83cm / 6'3" x 2'5"			
Rear Bunk (Upper)					
Rear Bunk (Lower)					
Overcab bed		190cm x 134c	m / 6'3" x 4'5"		

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Edge 486	Standard	Edge 486 Optional	
Roof Profile		High Line		
Engine	120 MJT	/ 140 MJT	140 MJT Auto	
Engine Capacity		2.2	ltr	
Max Power	120 hp @ 3500 rpm	/ 140 HP @ 3500rpm	140 HP @ 3500rpm	
Torque	320 Nm@1400 rpm	/ 350 Nm @ 1400rpm	380 Nm @ 1400rpm	
Chassis		LWB Fiat	Chassis	
Wheel base		4.04m	/ 13′ 3″	
Designated Passenger Seats (excluding Driver)		5	i	
Berths (sleeping positions)		6	i	
Overall Length (no ladder)		7.32m	/ 24'0"	
Overall Width (mirrors folded)		2.39m	/ 7'10"	
Overall Height		2.98m	/ 9'9"	
Maximum Technical Permissible Laden Mass (A)	3500kg	3650kg	3650kg	
Mass in Running Order (B)	2991kg	2991kg	3024kg	
Maximum User Payload (A-B)	509kg	659kg	626kg	
Unladen Weight	2861kg	2861kg	2894kg	
Essential Habitation Equipment		0k	kg	
Thermal Insulation Grade		THE	REE	
Bed Sizes				
Front Double		215cm x 180cm / 121	cm / 7'1" x 5'11" / 4'0"	
Rear Double		214cm x 131c	m / 7'0" x 4'4"	
Rear Nearside Single				
Rear Offside Single				
Rear Bunk (Upper)				
Rear Bunk (Lower)				
Overcab bed		190cm x 134c	m / 6'3" x 4'5"	

NOTE: 1. The Maximum User Payload includes:

- a) the **conventional load** (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) **optional equipment** (items available from the manufacturer over and above the standard specification)
- d) personal effects (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Edge 494	Standard	Edge 494	Optional	
Roof Profile		High Line			
Engine	120 MJT	/ 140 MJT	140 MJT Auto		
Engine Capacity		2.21	ltr		
Max Power	120 hp @ 3500 rpm	/140 HP @ 3500rpm	140 HP@	3500rpm	
Torque	320 Nm@1400 rpm	/350 Nm@1400rpm	380 Nm @	9 1400rpm	
Chassis		LWB Fiat	Chassis		
Wheel base		4.04m /	13'3"		
Designated Passenger Seats (excluding Driver)		3			
Berths (sleeping positions)		4			
Overall Length (no ladder)		7.32m /	24'0"		
Overall Width (mirrors folded)		2.39m / 7'10"			
Overall Height		2.98m	/ 9'9"		
Maximum Technical Permissible Laden Mass (A)	3500kg	3650kg	3500kg	3650kg	
Mass in Running Order (B)	2975kg	2975kg	3008kg	3008kg	
Maximum User Payload (A-B)	525kg	675kg	492kg	642kg	
Unladen Weight	2845kg	2845kg	2878kg	2878kg	
Essential Habitation Equipment		0kg	g		
Thermal Insulation Grade		THR	EE		
Bed Sizes					
Front Double					
Rear Double		185cm x 133cr	m / 6′1″ x 4′4″		
Rear Nearside Single					
Rear Offside Single					
Rear Bunk (Upper)					
Rear Bunk (Lower)					
Overcab bed		190cm x 134cm / 6'3" x 4'5"			

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Edge Capacities

Water Tank Capacities

	Fresh Water Tank	Waste Water Tank	Water Heater
Edge	100 litre	68 litre	10 litre

LPG Locker Capacity

	Capacity	
Edge	1 x 6kg + 1 x13kg	

NOTICE: For technical data on the base vehicle please refer to the manufacturer's handbook

Edge Towing Capabilities

Edge Towing Capabilities

Model	MTPLM	Permissible Front Axle Load	Permissible Rear Axle Load	Recommended Maximum Trailer Weight	Gross Train Weight
EDGE 464	3500kg	1850kg / 1960kg Auto	2000kg	2000kg	5500kg
EDGE 464	3650kg	1850kg / 1960kg Auto	2000kg	2000kg	5650kg
EDGE 466	3500kg	1850kg / 1960kg Auto	2000kg	N/a	3500kg
EDGE 466	3650kg	1850kg / 1960kg Auto	2000kg	2000kg	5650kg
EDGE 476	3500kg	1850kg / 1960kg Auto	2000kg	N/a	3500kg
EDGE 476	3650kg	1850kg / 1960kg Auto	2000kg	2000kg	5650kg
EDGE 486	3500kg	1850kg / 1960kg Auto	2000kg	N/A	3500kg
EDGE 486	3650kg	1850kg / 1960kg Auto	2000kg	2000kg	5650kg
EDGE 494	3500kg	1850kg / 1960kg Auto	2000kg	2000kg	5500kg
EDGE 494	3650kg	1850kg / 1960kg Auto	2000kg	2000kg	5650kg

Please note that the additional weight of the tow bar and trailer nose weight increases the rear axle loading of the motor home so care should be taken that the rear axle load is not exceeded when towing.

To ensure adequate road holding, the load on the front axle, under all conditions, must not be less than 40% or more than 70% of the total weight.


Care must be taken when distributing loads. The loadings and weights above are maximums and must not be exceeded under any circumstances.

CAUTION:

When fitting a towbar, it must meet certain minimum requirements as specified by Type Approval Regulations. The bar will have marked on it the approval standard (94/20/EC or 55R ECE) and the maximum download, or noseweight, that it can accept. It must fit the manufacturer's approved mounting points and must not obscure the towing vehicle's number plate.

Edge Jacking

SWIFT EDGE

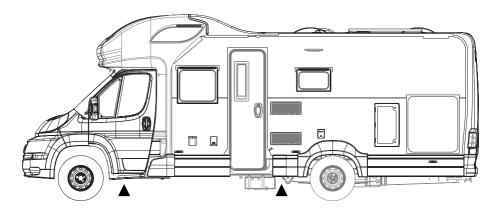

Jacking Points for: Edge 464, 466, 476, 486, & 494:

Model	Select Compact C205 Standard	Select Compact C205 Optional	Select Compact C205 Optional	
Roof Profile		Low Line		
Engine	120 MJT	120 MJT 140 MJT 140 MJ		
Engine Capacity		2.2ltr		
Max Power	120 HP @ 3500rpm	140 HP @ 3500rpm	140 HP @ 3500rpm	
Torque	320 Nm @ 1400rpm	350 Nm @ 1400rpm	380 Nm @ 1400rpm	
Chassis		MLWB Fiat Chassis		
Wheel base		3.80m / 12'6"		
Designated Passenger Seats (excluding Driver)		3		
Berths (sleeping positions)		2		
Overall Length (no ladder)		5.99m / 19'8"		
Overall Width (mirrors folded)		2.26m / 7'5"		
Overall Height		2.78m / 9'1"		
Maximum Technical Permissible Laden Mass (A)		3300kg		
Mass in Running Order (B)	2705kg	2705kg	2738kg	
Maximum User Payload (A-B)	595kg	595kg	562kg	
Unladen Weight	2562kg	2562kg	2595kg	
Essential Habitation Equipment		0kg		
Thermal Insulation Grade		THREE		
Bed Sizes				
Rear Double	194cm x 131cm / 6'4" x 4'4"			
Rear Nearside Single				
Rear Offside Single				
Drop Down Ded				

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAWAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Select Compact C404 Standard	Select Compact C404 Optional	Select Compact C404 Optional		
Roof Profile		Low Line			
Engine	120 MJT	140 MJT	140 MJT Auto		
Engine Capacity		2.2ltr			
Max Power	120 HP @ 3500rpm	140 HP @ 3500rpm	140 HP @ 3500rpm		
Torque	320 Nm @ 1400rpm	350 Nm @ 1400rpm	380 Nm @ 1400rpm		
Chassis		MLWB Fiat Chassis			
Wheel base		3.80m / 12'6"			
Designated Passenger Seats (excluding Driver)		3			
Berths (sleeping positions)		4			
Overall Length (no ladder)		5.99m / 19'8"			
Overall Width (mirrors folded)		2.26m / 7'5"			
Overall Height		2.78m / 9'1"			
Maximum Technical Permissible Laden Mass (A)		3300kg			
Mass in Running Order (B)	2775kg	2775kg	2808kg		
Maximum User Payload (A-B)	525kg	525kg	492kg		
Unladen Weight	2632kg	2632kg	2665kg		
Essential Habitation Equipment		0kg			
Thermal Insulation Grade		THREE			
Bed Sizes					
Rear Double	193cm x 120cm / 6'4" x 3'11"				
Rear Nearside Single					
Rear Offside Single					
Drop Down Ded		183cm x 118cm / 6'1" x 3'10'	ı		

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Select Compact C500 Standard	Select Compact C500 Optional	Select Compact C500 Optional	
Roof Profile		Low Line		
Engine	120 MJT	140 MJT	140 MJT Auto	
Engine Capacity		2.2ltr		
Max Power	120 HP @ 3500rpm	140 HP @ 3500rpm	140 HP @ 3500rpm	
Torque	320 Nm @ 1400rpm	350 Nm @ 1400rpm	380 Nm @ 1400rpm	
Chassis		MLWB Fiat Chassis		
Wheel base		3.80m / 12'6"		
Designated Passenger Seats (excluding Driver)		3		
Berths (sleeping positions)		2		
Overall Length (no ladder)		6.65m / 21'10"		
Overall Width (mirrors folded)		2.26m / 7'5"		
Overall Height		2.78m / 9'1"		
Maximum Technical Permissible Laden Mass (A)		3300kg		
Mass in Running Order (B)	2797kg Est	2797kg Est	2830kg Est	
Maximum User Payload (A-B)	503kg Est	503kg Est	470kg Est	
Unladen Weight	2654kg Est	2654kg Est	2687kg Est	
Essential Habitation Equipment		0kg		
Thermal Insulation Grade		THREE		
Bed Sizes				
Rear Double		192cm x 183cm / 6'4" x 6'0"		
Rear Nearside Single		196cm x 68cm / 6'5" x 2'3"		
Rear Offside Single		183cm x 68cm / 6'0" x 2'3"		
Drop Down Ded				

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Select Compact C502 Standard						
Roof Profile		Low Line					
Engine	120 MJT	140 MJT	140 MJT Auto				
Engine Capacity		2.2ltr					
Max Power	120 HP @ 3500rpm	140 HP @ 3500rpm	140 HP @ 3500rpm				
Torque	320 Nm @ 1400rpm	350 Nm @ 1400rpm	380 Nm @ 1400rpm				
Chassis		MLWB Fiat Chassis					
Wheel base		3.80m / 12'6"					
Designated Passenger Seats (excluding Driver)		3					
Berths (sleeping positions)		2					
Overall Length (no ladder)		6.65m / 21'10"					
Overall Width (mirrors folded)		2.26m / 7'5"					
Overall Height		2.78m / 9'1"					
Maximum Technical Permissible Laden Mass (A)		3300kg					
Mass in Running Order (B)	2797kg	2797kg	2830kg				
Maximum User Payload (A-B)	503kg	503kg	470kg				
Unladen Weight	2654kg	2654kg	2687kg				
Essential Habitation Equipment		0kg					
Thermal Insulation Grade		THREE					
Bed Sizes							
Rear Double							
Rear Nearside Single		196cm x 74cm / 6'5" x 2'4"					
Rear Offside Single		184cm x 74cm / 6'0" x 2'4"					
Drop Down Ded							

NOTE: 1. The Maximum User Payload includes:

- a) the **conventional load** (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAWAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Escape 640 Standard	Escape 640 Optional	Escape 640 Optional	Escape 640 Optional		
Roof Profile		Low Line Pod				
Engine	140 MJT	140 MJT Auto	160 MJT	160 MJT Auto		
Engine Capacity		2.2ltr				
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm		
Torque	350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpn	400 Nm @ 1500rpm		
Chassis		Fiat / AL-	KO Chassis			
Wheel base		4.20m	1 / 13' 9"			
Designated Passenger Seats (excluding Driver)			3			
Berths (sleeping positions)			4			
Overall Length (no ladder)		6.99m	/ 22'11"			
Overall Width (mirrors folded)		2.37r	n / 7'9"			
Overall Height		2.86r	n / 9'5"			
Maximum Technical Permissible Laden Mass (A)		350	00kg			
Mass in Running Order (B)	3061kg	3094kg	3076kg	3094kg		
Maximum User Payload (A-B)	439kg	406kg	424kg	406kg		
Unladen Weight	2930kg	2963kg	2945kg	2963kg		
Essential Habitation Equipment		0	lkg			
Thermal Insulation Grade		TH	REE			
Bed Sizes						
Front Double		194cm x 165cm / 13	6cm / 6'4" x 5'10" / 4'6	"		
Rear Double						
Rear Nearside Single						
Rear Offside Single						
Drop Down Bed		189cm x 150a	cm / 6'2" x 4'11"			

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Escape 664 Standard	Escape 664 Optional	Escape 664 Optional	Escape 664 Optional	
Roof Profile		Low L	ine Pod		
Engine	140 MJT	140 MJT Auto	160 MJT	160 MJT Auto	
Engine Capacity	2.2ltr				
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm	
Torque	350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	
Chassis		Fiat / AL-	KO Chassis		
Wheel base		4.30m	n / 14' 1"		
Designated Passenger Seats (excluding Driver)			3		
Berths (sleeping positions)			4		
Overall Length (no ladder)		7.84n	n / 25'9"		
Overall Width (mirrors folded)		2.37r	m / 7′9″		
Overall Height		2.88m	/ 9'5" Est		
Maximum Technical Permissible Laden Mass (A)		35	00kg		
Mass in Running Order (B)	3111kg Est	3144kg Est	3126kg Est	3144kg Est	
Maximum User Payload (A-B)	389kg Est	356kg Est	374kg Est	356kg Est	
Unladen Weight	2980kg Est	3013kg Est	2995kg Est	3013kg Est	
Essential Habitation Equipment		C)kg		
Thermal Insulation Grade		TH	IREE		
Bed Sizes					
Front Double		194cm x 133cm / 10	06cm / 6'4" x 4'4" / 3'6'		
Rear Double		188cm x 129cm / 6'2" x 4'3"			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- 2. The **Mass in Running Order** is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Escape 674 Standard	Escape 674 Optional	Escape 674 Optional	Escape 674 Optional		
Roof Profile		Low Line Pod				
Engine	140 MJT	140 MJT Auto	160 MJT	160 MJT Auto		
Engine Capacity		2.	2ltr			
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm		
Torque	350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm		
Chassis		Fiat / AL-	KO Chassis			
Wheel base		4.70m	n / 15′5″			
Designated Passenger Seats (excluding Driver)			4			
Berths (sleeping positions)			6			
Overall Length (no ladder)		8.22m	n / 27'0"			
Overall Width (mirrors folded)		2.37r	n / 7'9"			
Overall Height		2.86r	n / 9'5"			
Maximum Technical Permissible Laden Mass (A)		450	00kg			
Mass in Running Order (B)	3251kg Est	3284kg Est	3266kg Est	3284kg Est		
Maximum User Payload (A-B)	1249kg Est	1216kg Est	1234kg Est	1216kg Est		
Unladen Weight	3108kg Est	3141kg Est	3123kg Est	3141kg Est		
Essential Habitation Equipment		0	lkg			
Thermal Insulation Grade		TH	REE			
Bed Sizes						
Front Double		194cm x 136cm / 6'4" x 4'6"				
Rear Double		202cm x 132cm / 6'8" x 4'4"				
Rear Nearside Single						
Rear Offside Single						
Drop Down Bed		189cm x 150a	cm / 6'2" x 4'11"			

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Escape 684 Standard	Escape 684 Optional	Escape 684 Optional	Escape 684 Optional		
Roof Profile		Low L	ine Pod			
Engine	140 MJT	140 MJT Auto	160 MJT	160 MJT Auto		
Engine Capacity		2.2ltr				
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm		
Torque	350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm		
Chassis		Fiat / AL-	KO Chassis			
Wheel base		4.70n	n / 15′5″			
Designated Passenger Seats (excluding Driver)			3			
Berths (sleeping positions)			4			
Overall Length (no ladder)		7.84n	n / 25'9"			
Overall Width (mirrors folded)		2.371	m / 7'9"			
Overall Height		2.88m	/ 9'5" Est			
Maximum Technical Permissible Laden Mass (A)	3500kg	3700kg	3500kg	3700kg		
Mass in Running Order (B)	3131kg Est	3164kg Est	3146kg Est	3164kg Est		
Maximum User Payload (A-B)	369kg Est	536kg Est	354kg Est	536kg Est		
Unladen Weight	3000kg Est	3033kg Est	3015kg Est	3033kg Est		
Essential Habitation Equipment		()kg			
Thermal Insulation Grade		TH	IREE			
Bed Sizes						
Front Double		194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"				
Rear Double		206cm x 115cm / 6'9" x 3'9"				
Rear Nearside Single		195cm x 78cm / 6'5" x 2'7"				
Rear Offside Single		195cm x 78cm / 6'5" x 2'7"				
Drop Down Bed						

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEM YOU INTEND TO CARRY IN THE MOTOR CARAWAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Escape 694 Standard	Escape 694 Optional	Escape 694 Optional	Escape 694 Optional	
Roof Profile		Low L	ine Pod		
Engine	140 MJT	140 MJT Auto	160 MJT	160 MJT Auto	
Engine Capacity		2	.2ltr		
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm	
Torque	350 Nm @ 1400rpm	380 Nm @ 1400rpn	380 Nm @ 1500rpm	400 Nm @ 1500rpm	
Chassis		Fiat / AL-	KO Chassis		
Wheel base		4.70r	n / 15′5″		
Designated Passenger Seats (excluding Driver)			3		
Berths (sleeping positions)			4		
Overall Length (no ladder)		7.84r	n / 25'9"		
Overall Width (mirrors folded)		2.37	m / 7'9"		
Overall Height		2.88	m / 9'5"		
Maximum Technical Permissible Laden Mass (A)	3700kg	3700kg	3700kg	3700kg	
Mass in Running Order (B)	3178kg Est	3211kg Est	3193kg Est	3211kg Est	
Maximum User Payload (A-B)	522kg	489kg	507kg	489kg	
Unladen Weight	3047kg Est	3080kg Est	3062kg Est	3080kg Est	
Essential Habitation Equipment		()kg		
Thermal Insulation Grade		TH	IREE		
Bed Sizes					
Front Double		194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"			
Rear Double		180cm x 143cm / 5′11″ x 4′8″			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Select Compact & Escape Capacities

Water Tank Capacities

	Fresh Water Tank	Waste Water Tank	Water Heater
Select Compact	ct Compact 100 litre		10 litre
Escape	90 litre	68 litre	10 litre

LPG Locker Capacity

	Capacity
Select Compact	2 x 6kg
Escape	1 x 6kg + 1 x 13kg

NOTICE: For technical data on the base vehicle please refer to the manufacturer's handbook

Select Compact & Escape Towing Capabilities

Escape Towing Capabilities

Model	MTPLM	Permissible Front Axle Load	Permissible Rear Axle Load	Recommended Maximum Trailer Weight	Gross Train Weight
Select Compact C205	3300kg	1750kg / 1840kg Auto	1900kg	2000kg	5800kg
Select Compact C404	3300kg	1750kg / 1840kg Auto	1900kg	2000kg	5800kg
Select Compact C500	3300kg	1750kg / 1840kg Auto	1900kg	2000kg	5800kg
Select Compact C502	3300kg	1750kg / 1840kg Auto	1900kg	2000kg	5800kg
Escape 640	3500kg	1850kg / 1960kg Auto	2000kg	2000kg	5500kg
Escape 640	3700kg	1850kg / 1960kg Auto	2000kg	2000kg	5500kg
Escape 664	3500kg	1850kg / 1960kg Auto	2000kg	2000kg	5500kg
Escape 664	3700kg	1850kg / 1960kg Auto	2000kg	2000kg#	5500kg#
Escape 674	4500kg	2100kg	2500kg	2000kg#	6000kg#
Escape 684	3500kg	1850kg / 1960kg Auto	2000kg	2000kg	5500kg
Escape 684	3700kg	1850kg / 1960kg Auto	2000kg	2000kg#	5500kg#
Escape 694	3500kg	1850kg / 1960kg Auto	2000kg	2000kg	5500kg
Escape 694	3700kg	1850kg / 1960kg Auto	2000kg	2000kg#	5500kg#

Please note that the additional weight of the tow bar and trailer nose weight increases the rear axle loading of the motor home so care should be taken that the rear axle load is not exceeded when towing.

To ensure adequate road holding, the load on the front axle, under all conditions, must not be less than 40% or more than 70% of the total weight.


Care must be taken when distributing loads. The loadings and weights above are maximums and must not be exceeded under any circumstances.


- * With this vehicle configuration it will be necessary to reduce the payload carried inside the van when towing to ensure that the MTPLM and Maximum Axle Loads are not exceeded.
- # The Maximum Trailer Weight is limited by the Gross Train Weight which must not be exceeded. For example if the vehicle is at its maximum MTPLM of 3650kg, then the Maximum Trailer Weight possible is 1850kg. Reducing the weight of the vehicle by removing payload, will allow you to increase the trailer weight up to a maximum of 2000kg.

CAUTION:

When fitting a towbar, it must meet certain minimum requirements as specified by Type Approval Regulations. The bar will have marked on it the approval standard (94/20/EC or 55R ECE) and the maximum download, or noseweight, that it can accept. It must fit the manufacturer's approved mounting points and must not obscure the towing vehicle's number plate.

Select Compact & Escape Jacking

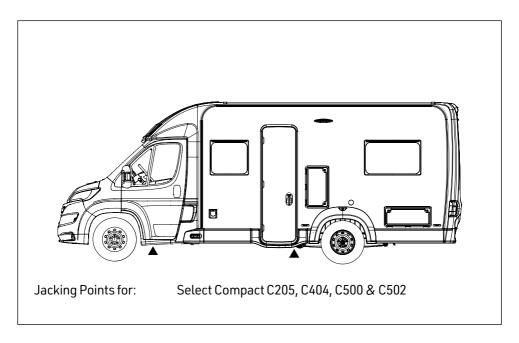

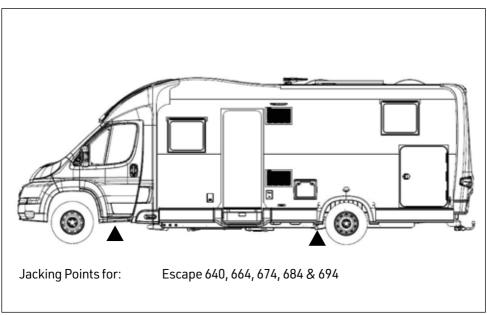

Model	Kon-Tiki 764 Standard	Kon-Tiki 764 Optional	Kon-Tiki 764 Optional	Kon-Tiki 764 Optional	
Roof Profile		Low Li	ine Pod		
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.3	2ltr		
Max Power	160 HP@	3500rpm	180 HP @	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-	(O Chassis		
Wheel base		4.30m	/ 14'1"		
Designated Passenger Seats (excluding Driver)			3		
Berths (sleeping positions)			4		
Overall Length (no ladder)		7.84m	/ 25'9"		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.89n	n / 9'6"		
Maximum Technical Permissible Laden Mass (A)		450	10kg		
Mass in Running Order (B)	3397kg Est	3415kg Est	3397kg Est	3415kg Est	
Maximum User Payload (A-B)	1103kg	1085kg	1103kg	1085kg	
Unladen Weight	3232kg Est	3250kg Est	3232kg Est	3250kg Est	
Essential Habitation Equipment		0	kg		
Thermal Insulation Grade		TH	REE		
Bed Sizes					
Front Double		194cm x 133cm / 10a	6cm / 6'4" x 4'4" / 3'6"		
Rear Double		188cm x 129cm / 6'2" x 4'3"			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAWAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 774 Standard	Kon-Tiki 774 Optional	Kon-Tiki 774 Optional	Kon-Tiki 774 Optional	
Roof Profile		Low Li	ne Pod		
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.1	2ltr		
Max Power	160 HP@	3500rpm	180 HP@	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-	(O Chassis		
Wheel base		4.70m	/ 15'5"		
Designated Passenger Seats (excluding Driver)			4		
Berths (sleeping positions)		,	6		
Overall Length (no ladder)		8.22m	/ 27'0"		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.87n	n / 9'5"		
Maximum Technical Permissible Laden Mass (A)		450)0kg		
Mass in Running Order (B)	3617kg Est	3635kg Est	3617kg Est	3635kg Est	
Maximum User Payload (A-B)	883kg	865kg	883kg	865kg	
Unladen Weight	3452kg Est	3470kg Est	3452kg Est	3470kg Est	
Essential Habitation Equipment		0	kg		
Thermal Insulation Grade		TH	REE		
Bed Sizes					
Front Double		194cm x 136cm / 6'4" x 4'6"			
Rear Double		203cm x 132cm / 6'8" x 4'4"			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed		189cm x 150c	m / 6'2" x 4'11"		

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAWAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 784 Standard	Kon-Tiki 784 Optional	Kon-Tiki 784 Optional	Kon-Tiki 784 Optional		
Roof Profile		Low Line Pod				
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto		
Engine Capacity		2.2ltr				
Max Power	160 HP@	3500rpm	180 HP @	3500rpm		
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm		
Chassis		Fiat / AL-I	KO Chassis			
Wheel base		4.70m	1/15'5"			
Designated Passenger Seats (excluding Driver)			3			
Berths (sleeping positions)			4			
Overall Length (no ladder)		7.84m	1 / 25'9"			
Overall Width (mirrors folded)		2.38m	7'10"			
Overall Height		2.89n	n / 9'6"			
Maximum Technical Permissible Laden Mass (A)		450)0kg			
Mass in Running Order (B)	3440 Est	3458kg Est	3440 Est	3458kg Est		
Maximum User Payload (A-B)	1060kg	1042kg	1060kg	1042kg		
Unladen Weight	3275kg Est	3293kg Est	3275kg Est	3293kg Est		
Essential Habitation Equipment		0	kg			
Thermal Insulation Grade		TH	REE			
Bed Sizes						
Front Double		194cm x 133cm / 10	6cm / 6'4" x 4'4" / 3'6"			
Rear Double		206cm x 115	cm / 6'9" x 3'9"			
Rear Nearside Single		195cm x 78cm / 6'5" x 2'7"				
Rear Offside Single		195cm x 78cm / 6'5" x 2'7"				
Drop Down Bed						

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 794 Standard	Kon-Tiki 794 Optional	Kon-Tiki 794 Optional	Kon-Tiki 794 Optional	
Roof Profile		Low Line Pod			
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.2	2ltr		
Max Power	160 HP@	3500rpm	180 HP @	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-	(O Chassis		
Wheel base		4.70m	/ 15'5"		
Designated Passenger Seats (excluding Driver)			3		
Berths (sleeping positions)			4		
Overall Length (no ladder)		7.84m	/25'9"		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.89n	n / 9'6"		
Maximum Technical Permissible Laden Mass (A)		450	10kg		
Mass in Running Order (B)	3477kg Est	3495kg Est	3477kg Est	3495kg Est	
Maximum User Payload (A-B)	1023kg	1005kg	1023kg	1005kg	
Unladen Weight	3312kg Est	3330kg Est	3312kg Est	3330kg Est	
Essential Habitation Equipment		0	kg		
Thermal Insulation Grade		THREE			
Front Double		194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"			
Rear Double		180cm x 143c	m / 5'11" x 4'8"		
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 874 Standard	Kon-Tiki 874 Optional	Kon-Tiki 874 Optional	Kon-Tiki 874 Optional	
Roof Profile		Low Line Pod			
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.3	2ltr		
Max Power	160 HP@	3500rpm	180 HP @	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-	(O Chassis		
Wheel base		4.70m / 0.80i	m / 15′5″ / 2′7″		
Designated Passenger Seats (excluding Driver)			4		
Berths (sleeping positions)			6		
Overall Length (no ladder)		8.96m/	29'5" Est		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.91cm	/ 9'6" Est		
Maximum Technical Permissible Laden Mass (A)		500	10kg		
Mass in Running Order (B)	3942kg Est	3960kg Est	3942kg Est	3960kg Est	
Maximum User Payload (A-B)	1058kg	1040kg	1058kg	1040kg	
Unladen Weight	3777kg Est	3795kg Est	3777kg Est	3795kg Est	
Essential Habitation Equipment		0	kg		
Thermal Insulation Grade		THREE			
Bed Sizes					
Front Double		194cm x 150cm / 136cm / 6'4" x 4'11" / 4'6"			
Rear Double		203cm x 183cm / 6'8" x 6'0"			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed		189cm x 150cm / 6'2" x 4'11"			

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 884 Standard	Kon-Tiki 884 Optional	Kon-Tiki 884 Optional	Kon-Tiki 884 Optional	
Roof Profile		Low Line Pod			
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.1	2ltr		
Max Power	160 HP@	3500rpm	180 HP @	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-	(O Chassis		
Wheel base		4.70m / 0.80i	m / 15′5″ / 2′7″		
Designated Passenger Seats (excluding Driver)		;	3		
Berths (sleeping positions)			4		
Overall Length (no ladder)		8.96m/	29'5" Est		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.92m /	9'7" Est		
Maximum Technical Permissible Laden Mass (A)		500	10kg		
Mass in Running Order (B)	3765kg Est	3783kg Est	3765kg Est	3783kg Est	
Maximum User Payload (A-B)	1235kg	1217kg	1235kg	1217kg	
Unladen Weight	3600kg Est	3618kg Est	3600kg Est	3618kg Est	
Essential Habitation Equipment		0	kg		
Thermal Insulation Grade		THREE			
Bed Sizes					
Front Double		194cm x 186cm / 150cm / 6'4" x 6'1" / 4'11"			
Rear Double		206cm x 115cm / 6'9" x 3'9"			
Rear Nearside Single		195cm x 78cm / 6'5" x 2'7"			
Rear Offside Single		195cm x 78cm / 6'5" x 2'7"			
Drop Down Bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 894 Standard	Kon-Tiki 894 Optional	Kon-Tiki 894 Optional	Kon-Tiki 894 Optional	
Roof Profile		Low Line Pod			
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.3	2ltr		
Max Power	160 HP@	3500rpm	180 HP @	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-	(O Chassis		
Wheel base		4.70m / 0.80i	m / 15′5″ / 2′7″		
Designated Passenger Seats (excluding Driver)			3		
Berths (sleeping positions)			4		
Overall Length (no ladder)		8.96m/	29'5" Est		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.92m /	'9'7" Est		
Maximum Technical Permissible Laden Mass (A)		500	10kg		
Mass in Running Order (B)	3802kg Est	3820kg Est	3802kg Est	3820kg Est	
Maximum User Payload (A-B)	1198kg	1180kg	1198kg	1180kg	
Unladen Weight	3637kg Est	3655kg Est	3637kg Est	3655kg Est	
Essential Habitation Equipment		0	kg		
Thermal Insulation Grade		THREE			
Bed Sizes					
Front Double		194cm x 186cm / 150cm / 6'4" x 6'1" / 4'11"			
Rear Double		195cm x 143cm / 6'5" x 4'8"			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 984 Standard	Kon-Tiki 984 Optional	Kon-Tiki 984 Optional	Kon-Tiki 984 Optional	
Roof Profile		High Line			
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.3	2ltr		
Max Power	160 HP @	3500rpm	180 HP@	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-	(O Chassis		
Wheel base		4.60m / 15'1"	- 0.80m / 2′7″		
Designated Passenger Seats (excluding Driver)		;	3		
Berths (sleeping positions)			6		
Overall Length (no ladder)		9.01m	/ 29'7"		
Overall Width (mirrors folded)		2.35n	n / 7′9″		
Overall Height		3.13m	/ 10'3"		
Maximum Technical Permissible Laden Mass (A)		500)0kg		
Mass in Running Order (B)	4147kg Est	4165kg Est	4147kg Est	4165kg Est	
Maximum User Payload (A-B)	853kg Est	835kg Est	853kg Est	835kg Est	
Unladen Weight	3993kg Est	4011kg Est	3993kg Est	4011kg Est	
Essential Habitation Equipment		0	kg		
Thermal Insulation Grade		THREE			
Bed Sizes					
Front Double		204cm x 135cm / 6'8" x 4'5"			
Rear Double		203cm x 138cm / 6'8" x 4'6"			
Rear Nearside Single		193cm x 81cm / 6'4"x 2'8"			
Rear Offside Single		193cm x 81cm / 6'4"x 2'8"			
Drop Down Bed		190cm x 134cm / 6'3" x 4'5"			

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 994 Standard	Kon-Tiki 994 Optional	Kon-Tiki 994 Optional	Kon-Tiki 994 Optional	
Roof Profile		High Line			
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.2	2ltr	•	
Max Power	160 HP @	3500rpm	180 HP @	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-k	(O Chassis		
Wheel base		4.60m / 15'1"	- 0.80m / 2'7"		
Designated Passenger Seats (excluding Driver)		:	3		
Berths (sleeping positions)			6		
Overall Length (no ladder)		9.01m	/ 29'7"		
Overall Width (mirrors folded)		2.35n	n / 7'9"		
Overall Height		3.13m	/ 10'3"		
Maximum Technical Permissible Laden Mass (A)		500	10kg		
Mass in Running Order (B)	4147kg Est	4165kg Est	4147kg Est	4165kg Est	
Maximum User Payload (A-B)	853kg Est	835kg Est	853kg Est	835kg Est	
Unladen Weight	3993kg Est	4011kg Est	3993kg Est	4011kg Est	
Essential Habitation Equipment		0	kg		
Thermal Insulation Grade		THREE			
Bed Sizes					
Front Double		204cm x 135cm / 6'8" x 4'5"			
Rear Double		192cm x 143cm /6'4 "x 4'8"			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed		190 x 134cr	n / 6'3" x 4'5"		

Kon-Tiki Capacities

Water Tank Capacities

	Fresh Water Tank		Water Heater	
Kon-Tiki 700 & 800 90 litre		68 litre	8.5 litre	
Kon-Tiki 900 125 litre		100 litre	8.5 litre	

LPG Locker Capacity

	Capacity
Kon-Tiki 700 & 800	1 x 6kg + 1 x 13kg
Kon-Tiki 900	2 x 13kg

Note: For technical data on the base vehicle please refer to the manufacturer's handbook

Kon-Tiki Towing Capabilities

Kon-Tiki Towing Capabilities

Model	MTPLM	Permissible Front Axle Load	Permissible Rear Axle Load	Recommended Maximum Trailer Weight	Gross Train Weight
Kon-Tiki 764	4500kg	2100kg	2500kg	2000kg#	6000kg#
Kon-Tiki 774	4500kg	2100kg	2500kg	2000kg#	6000kg#
Kon-Tiki 784	4500kg	2100kg	2500kg	2000kg#	6000kg#
Kon-Tiki 794	4500kg	2100kg	2500kg	2000kg#	6000kg#
Kon-Tiki 874	5000kg	2100kg	2 x 1600kg	2000kg#	6000kg#
Kon-Tiki 884	5000kg	2100kg	2 x 1600kg	2000kg#	6000kg#
Kon-Tiki 894	5000kg	2100kg	2 x 1600kg	2000kg#	6000kg#
Kon-Tiki 984	5000kg	2100kg	2 x 1600kg	2000kg#	6000kg#
Kon-Tiki 994	5000kg	2100kg	2 x 1600kg	2000kg#	6000kg#

Please note that the additional weight of the tow bar and trailer nose weight increases the rear axle loading of the motor home so care should be taken that the rear axle load is not exceeded when towing.

To ensure adequate road holding, the load on the front axle, under all conditions, must not be less than 40% or more than 70% of the total weight.

Care must be taken when distributing loads. The loadings and weights above are maximums and must not be exceeded under any circumstances.

- With this vehicle configuration it will be necessary to reduce the payload carried inside the van when towing to ensure that the MTPLM and Maximum Axle Loads are not exceeded.
- # The Maximum Trailer Weight is limited by the Gross Train Weight which must not be exceeded. For example if a vehicle with a train weight of 6000kg is loaded to the maximum MTPLM of 4500kg then the maximum trailer weight possible is 1500kg. Reducing the weight of the vehicle by removing payload, will allow you to increase the trailer weight up to a maximum of 2000kg.


CAUTION:

When fitting a towbar, it must meet certain minimum requirements as specified by Type Approval Regulations. The bar will have marked on it the approval standard (94/20/EC or 55R ECE) and the maximum download, or noseweight, that it can accept. It must fit the manufacturer's approved mounting points and must not obscure thetowing vehicle's number plate.

Kon-Tiki Jacking


Kon-Tiki single axle jacking points

Kon-Tiki twin axle jacking points

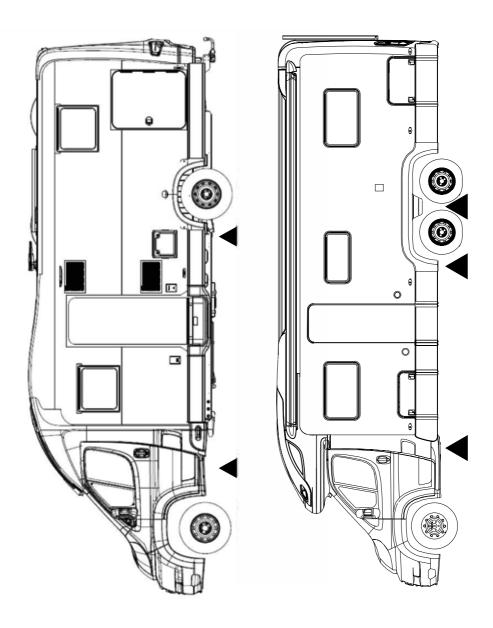


Wiring Diagrams


Road lighting circuits

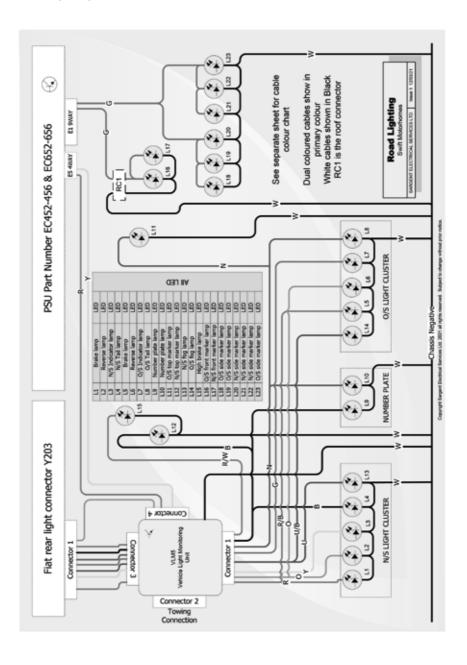


Kon-Tiki Consumer Circuits - Floor

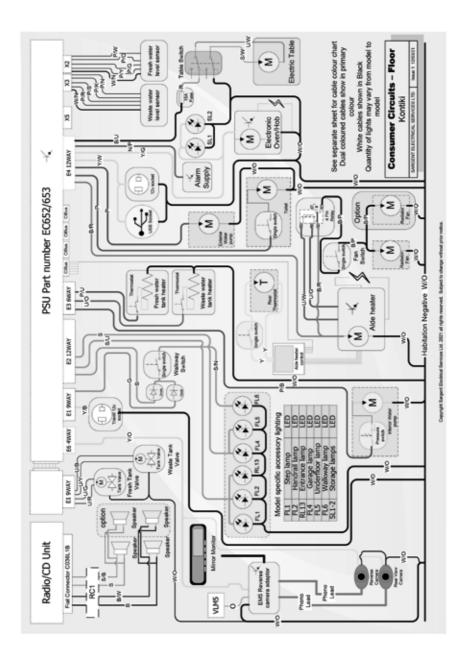


Edge, Escape and Select Compact Consumer Circuits - Floor

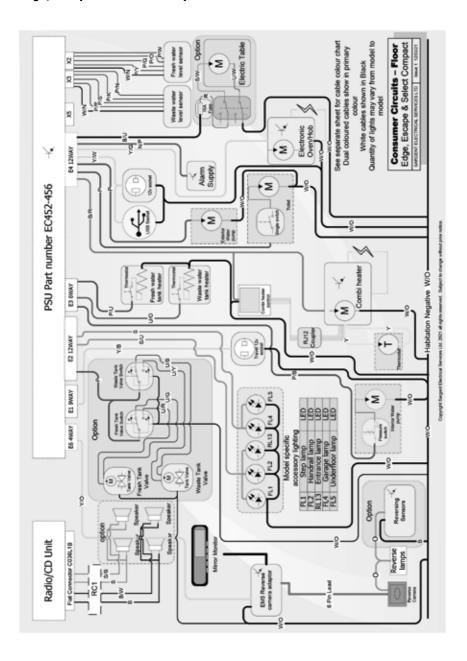


Power Circuits Edge, Escape and Select Compact

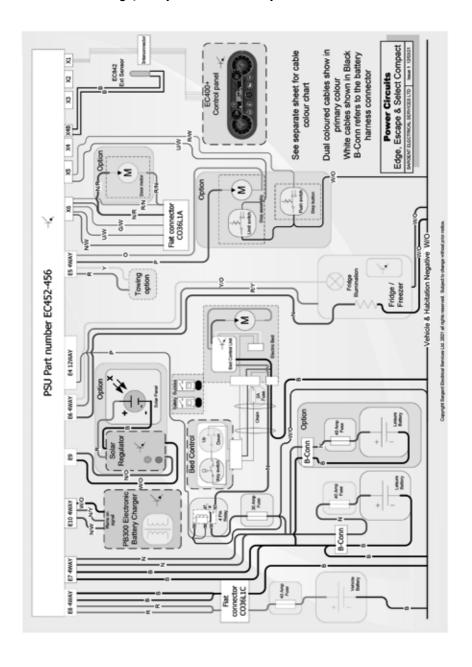


Power Circuits Kon-Tiki

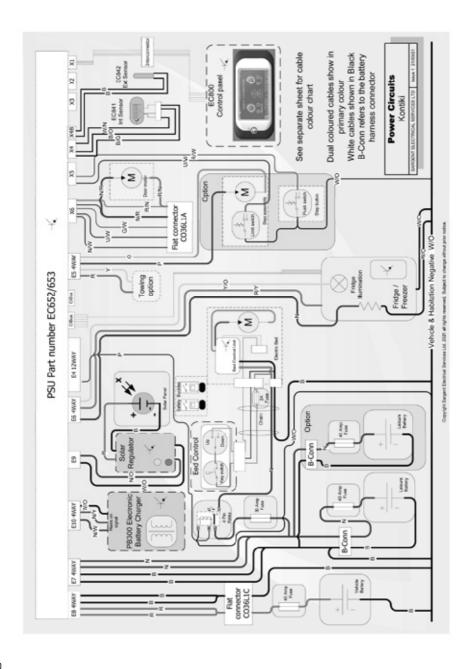


Kon-Tiki Consumer Circuits - Roof

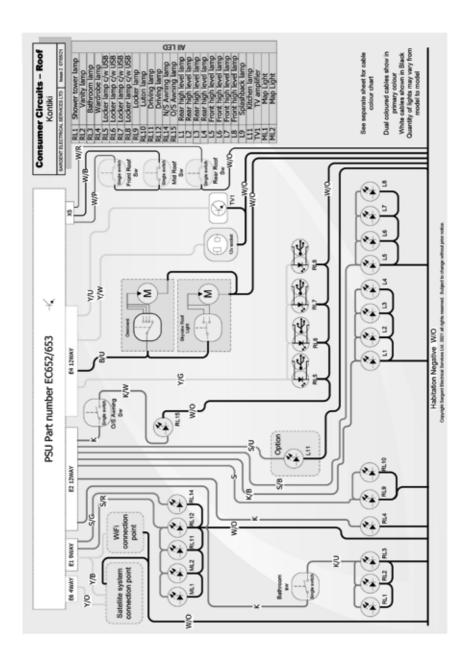


Edge, Escape and Select Compact Consumer Circuits - Roof

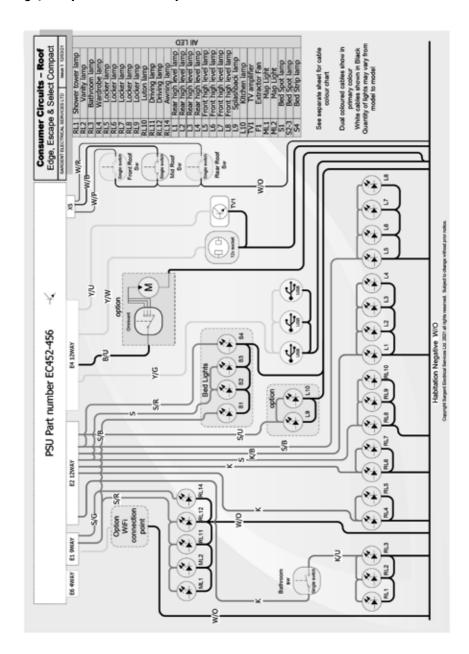

230V Circuits

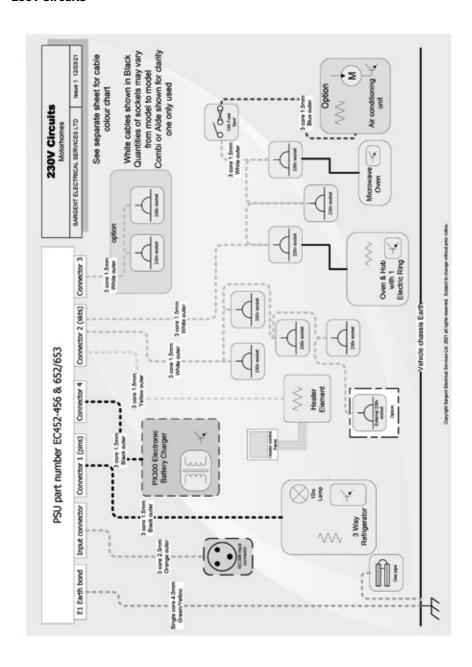

Cable Colour Chart

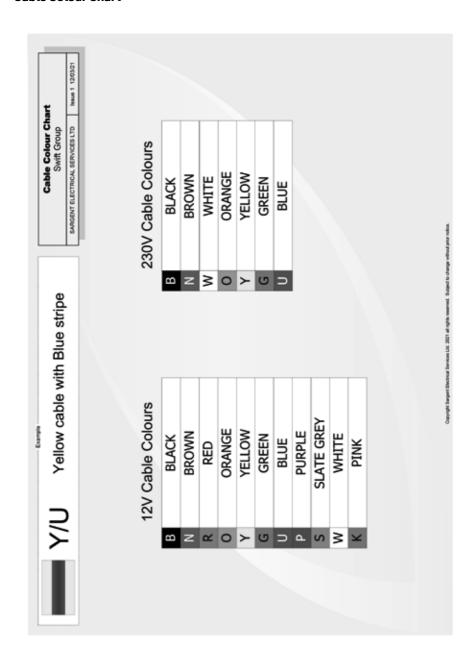

Bulb Replacement

ROAD LIGHT BULB ACCESS

REAR LIGHT CLUSTERS (CONTAINING INDICATOR, TAIL / STOP, REVERSE AND FOG LAMPS)

- These multi-function lights are LED and have no user serviceable parts inside.
- Replacement clusters can be fitted in the following way:
- Remove three screws visible around the perimeter of the cluster
- Pull the cluster away from the rear panel of the tourer, taking care to not put excessive strain on the electrical connections behind the lamp
- Unplug the electrical connection from the rear of the lamp, by releasing the tab and lifting the connector upwards relative to the cluster
- Plug the connector back into the replacement lamp, position the lamp into the recess and replace the three fixing screws.

NUMBER PLATE LAMPS, LED

- These lamps are LED and have no user serviceable parts inside.
- Replacements should be undertaken by your dealer, as the lamps are sealed onto the mounting panel.

HIGH LEVEL BRAKE LAMP

- These lamps are LED and have no user serviceable parts inside.
- Replacements should be undertaken by your dealer, as the lamps are sealed onto the mounting panel.

FRONT AND REAR UPPER MARKER / POSITION I AMPS

- These lamps are LED and have no user serviceable parts inside.
- Replacements should be undertaken by your dealer, as the lamps are sealed onto the mounting panel.

SIDE MARKER / POSITION LAMPS

- These lamps are LED and have no user serviceable parts inside.
- Replacements should be undertaken by your dealer, as the lamps are sealed onto the mounting panel.

Model	Escape 640 Standard	Escape 640 Optional	Escape 640 Optional	Escape 640 Optional	
Dealer					
Lowdhams		Hi-Si	yle 640		
Merit RV (NZ)		Voya	ger 640		
Roof Profile		Low l	ine Pod		
Engine	140 MJT	140 MJT Auto	160 MJT	160 MJT Auto	
Engine Capacity		2	.2ltr		
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm	
Torque	350 Nm @ 1400rpm 380 Nm @ 1400rpm 380 Nm @ 1500rpm 400 Nm @ 150				
Chassis		Fiat / AL-	KO Chassis		
Wheel base		4.20r	n / 13'9"		
Designated Passenger Seats (excluding Driver)	3				
Berths (sleeping positions)			4		
Overall Length (no ladder)		6.99m	1 / 22'11"		
Overall Width (mirrors folded)		2.37	m / 7'9"		
Overall Height		2.86	m / 9'5"		
Maximum Technical Permissible Laden Mass (A)		35	00kg		
Mass in Running Order (B)	3082kg	3115kg	3097kg	3115kg	
Maximum User Payload (A-B)	418kg	385kg	403kg	385kg	
Unladen Weight	2940kg	2973kg	2955kg	2973kg	
Essential Habitation Equipment		()kg		
Thermal Insulation Grade		TH	IREE		
Bed Sizes					
Front Double		194cm x 165cm / 13	6cm / 6'4" x 5'10" / 4'6	"	
Rear Double					
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed		189cm x 150	cm / 6'2" x 4'11"		

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Escape 664 Standard	Escape 664 Optional	Escape 664 Optional	Escape 664 Optional	
Dealer					
Lowdhams		Hi-St	yle 664		
Merit RV (NZ)		Voya	ger 664		
Roof Profile	Low Line Pod				
Engine	140 MJT 140 MJT Auto 160 MJT 160 MJT				
Engine Capacity		2	.2ltr		
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm	
Torque	350 Nm @ 1400rpm 380 Nm @ 1400rpm 380 Nm @ 1500rpm 400 Nm @ 150				
Chassis		Fiat / AL-	KO Chassis		
Wheel base		4.30n	n / 14′ 1″		
Designated Passenger Seats (excluding Driver)			3		
Berths (sleeping positions)			4		
Overall Length (no ladder)		7.84n	n / 25'9"		
Overall Width (mirrors folded)		2.371	m / 7'9"		
Overall Height		2.88m	/ 9'5" Est		
Maximum Technical Permissible Laden Mass (A)	3500kg Est	3700kg Est	3700kg Est	3700kg Est	
Mass in Running Order (B)	3132kg Est	3165kg Est	3147kg Est	3165kg Est	
Maximum User Payload (A-B)	368kg	535kg	553kg	535kg	
Unladen Weight	2990kg Est	3023kg Est	3005kg Est	3023kg Est	
Essential Habitation Equipment		()kg		
Thermal Insulation Grade		TH	IREE		
Bed Sizes					
Front Double	194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"				
Rear Double		188cm x 129	cm / 6'2" x 4'3"		
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed			·		

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Escape 674 Standard	Escape 674 Optional	Escape 674 Optional	Escape 674 Optional	
Dealer					
Lowdhams		Hi-Si	yle 674		
Merit RV (NZ)	Voyager 674				
Roof Profile		Lowl	ine Pod		
Engine	140 MJT	140 MJT Auto	160 MJT	160 MJT Auto	
Engine Capacity		2	.2ltr		
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm	
Torque	350 Nm @ 1400rpm	380 Nm @ 1400rpn	380 Nm @ 1500rpm	400 Nm @ 1500rpm	
Chassis		Fiat / AL-	KO Chassis		
Wheel base		4.70r	n / 15′5″		
Designated Passenger Seats (excluding Driver)	4				
Berths (sleeping positions)	6				
Overall Length (no ladder)		8.22r	n / 27'0"		
Overall Width (mirrors folded)		2.37	m / 7'9"		
Overall Height		2.86	m / 9'5"		
Maximum Technical Permissible Laden Mass (A)		4500	Okg Est		
Mass in Running Order (B)	3272kg Est	3305kg Est	3287kg Est	3305kg Est	
Maximum User Payload (A-B)	1228kg	1195kg	1213kg	1195kg	
Unladen Weight	3118kg Est	3151kg Est	3133kg Est	3151kg Est	
Essential Habitation Equipment		()kg		
Thermal Insulation Grade		Th	IREE		
Bed Sizes					
Front Double	194cm x 136cm / 6'4" x 4'6"				
Rear Double		202cm x 132cm / 6'8" x 4'4"			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed		189cm x 150	cm / 6'2" x 4'11"		

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Escape 684 Standard	Escape 684 Optional	Escape 684 Optional	Escape 684 Optional	
Dealer					
Lowdhams		Hi-St	yle 684		
Merit RV (NZ)		Voyag	ger 684		
Roof Profile		Low L	ine Pod		
Engine	140 MJT	140 MJT Auto	160 MJT	160 MJT Auto	
Engine Capacity		2.	2ltr		
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm	
Torque	350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	
Chassis		Fiat / AL-	KO Chassis		
Wheel base	4.70m / 15′5″				
Designated Passenger Seats (excluding Driver)	3				
Berths (sleeping positions)			4		
Overall Length (no ladder)		7.84m	n / 25'9"		
Overall Width (mirrors folded)		2.37r	m / 7'9"		
Overall Height		2.88m	/ 9'5" Est		
Maximum Technical Permissible Laden Mass (A)	3500kg Est	3700kg Est	3700kg Est	3700kg Est	
Mass in Running Order (B)	3152kg Est	3185kg Est	3167kg Est	3185kg Est	
Maximum User Payload (A-B)	348kg	515kg	533kg	515kg	
Unladen Weight	3010kg Est	3043kg Est	3025kg Est	3043kg Est	
Essential Habitation Equipment		0	lkg		
Thermal Insulation Grade		TH	IREE		
Bed Sizes					
Front Double	194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"				
Rear Double	206cm x 115cm / 6'9" x 3'9"				
Rear Nearside Single	195cm x 78cm / 6'5" x 2'7"				
Rear Offside Single		195cm x 78c	cm / 6'5" x 2'7"		
Drop Down Bed					

NOTE: 1. **The Maximum User Payload** includes: a) the **conventional load** (this is the allowance for

- passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Escape 694 Standard	Escape 694 Optional	Escape 694 Optional	Escape 694 Optional	
Dealer					
Lowdhams		Hi-St	yle 694		
Merit RV (NZ)		Voya	ger 694		
Roof Profile		Low l	ine Pod		
Engine	140 MJT	140 MJT Auto	160 MJT	160 MJT Auto	
Engine Capacity		2	.2ltr		
Max Power	140 Hp @	3500 rpm	160hp@	3500rpm	
Torque	350 Nm @ 1400rpm 380 Nm @ 1400rpm 380 Nm @ 1500rpm 400 Nm @ 1500				
Chassis		Fiat / AL-	KO Chassis		
Wheel base	4.70m / 15'5"				
Designated Passenger Seats (excluding Driver)			3		
Berths (sleeping positions)			4		
Overall Length (no ladder)		7.84r	n / 25'9"		
Overall Width (mirrors folded)		2.37	m / 7'9"		
Overall Height		2.88	m / 9'5"		
Maximum Technical Permissible Laden Mass (A)	3500kg Est	3700kg Est	3700kg Est	3700kg Est	
Mass in Running Order (B)	3152kg Est	3185kg Est	3167kg Est	3185kg Est	
Maximum User Payload (A-B)	348kg	515kg	533kg	515kg	
Unladen Weight	3010kg Est	3043kg Est	3025kg Est	3043kg Est	
Essential Habitation Equipment		()kg		
Thermal Insulation Grade		Th	IREE		
Bed Sizes					
Front Double	194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"				
Rear Double	180cm x 143cm / 5'11" x 4'8"				
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAWAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 764 Standard	Kon-Tiki 764 Optional	Kon-Tiki 764 Optional	Kon-Tiki 764 Optional		
Dealer						
Lowdhams		Kon-Tiki 76	4 Grand Prix			
			,			
Roof Profile		Low Li	ne Pod			
Engine	160 MJT	1001.01				
Engine Capacity		2.2	2ltr			
Max Power	160 HP@	3500rpm	180 HP @	3500rpm		
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm		
Chassis		Fiat / AL-k	(O Chassis			
Wheel base		4.30m	/ 14'1"			
Designated Passenger Seats (excluding Driver)		3				
Berths (sleeping positions)			4			
Overall Length (no ladder)		7.84m	/ 25'9"			
Overall Width (mirrors folded)		2.38m	/ 7'10"			
Overall Height		2.89m	n / 9'6"			
Maximum Technical Permissible Laden Mass (A)		450	10kg			
Mass in Running Order (B)	3397kg Est	3415kg Est	3397kg Est	3415kg Est		
Maximum User Payload (A-B)	1103kg	1085kg	1103kg	1085kg		
Unladen Weight	3232kg Est	3250kg Est	3232kg Est	3250kg Est		
Essential Habitation Equipment		01	kg			
Thermal Insulation Grade		THI	REE			
Bed Sizes						
Front Double	194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"					
Rear Double		188cm x 129cm / 6'2" x 4'3"				
Rear Nearside Single						
Rear Offside Single						
Drop Down Bed						

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Standard	Optional	Optional	Kon-Tiki 774 Optional	
	Kon-Tiki 77	4 Grand Prix		
	Low Li	ne Pod		
	2.2	2ltr		
160 HP@	3500rpm	180 HP @	3500rpm	
380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
	Fiat / AL-k	(O Chassis		
	4.70m / 15′5″			
4				
6				
	8.22m	/ 27'0"		
	2.38m	/ 7'10"		
	2.87m	n / 9'5"		
	450	0kg		
3617kg Est	3635kg Est	3617kg Est	3635kg Est	
883kg	865kg	883kg	865kg	
3452kg Est	3470kg Est	3452kg Est	3470kg Est	
	01	кg		
	THE	REE		
	19/cm v 13/c	m / 6'/ı" v /ı'6"		
	2000111 1020	, 00 ,44		
	189cm x 150ci	m / 6'2" x 4'11"		
	380 Nm @ 1500rpm	Low Li 160 MJT	2.2ltr 160 HP@ 3500rpm	

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 784 Standard	Kon-Tiki 784 Optional	Kon-Tiki 784 Optional	Kon-Tiki 784 Optional	
Dealer					
Lowdhams		Kon-Tiki 78	4 Grand Prix		
Roof Profile		Low Li	ne Pod		
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.2	2ltr		
Max Power	160 HP@	3500rpm	180 HP @	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-k	(O Chassis		
Wheel base		4.70m / 15′5″			
Designated Passenger Seats (excluding Driver)		3			
Berths (sleeping positions)			4		
Overall Length (no ladder)		7.84m	/ 25'9"		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.89m	n / 9'6"		
Maximum Technical Permissible Laden Mass (A)		450	10kg		
Mass in Running Order (B)	3440kg Est	3458kg Est	3440kg Est	Est 3458kg	
Maximum User Payload (A-B)	1060kg	1042kg	1060kg	1042kg	
Unladen Weight	3275kg Est	3293kg Est	3275kg Est	3293kg Est	
Essential Habitation Equipment		01	kg		
Thermal Insulation Grade		THI	REE		
Bed Sizes					
Front Double		194cm x 133cm / 106	5cm / 6'4" x 4'4" / 3'6"		
Rear Double		206cm x 115cm / 6'9" x 3'9"			
Rear Nearside Single		195cm x 78cm / 6'5" x 2'7"			
Rear Offside Single		195cm x 78c	m / 6'5" x 2'7"		
Drop Down Bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAWAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 794 Standard	Kon-Tiki 794 Optional	Kon-Tiki 794 Optional	Kon-Tiki 794 Optional	
Dealer					
Lowdhams		Kon-Tiki 79	4 Grand Prix		
Roof Profile			ne Pod		
Engine	160 MJT 160 MJT Auto 180 MJT 180 MJT Aut				
Engine Capacity		2.2	2ltr		
Max Power	160 HP@	3500rpm	_	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-k	(O Chassis		
Wheel base		4.70m	/ 15'5"		
Designated Passenger Seats (excluding Driver)		3			
Berths (sleeping positions)			4		
Overall Length (no ladder)		7.84m	/ 25'9"		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.89m	1/9'6"		
Maximum Technical Permissible Laden Mass (A)		450	0kg		
Mass in Running Order (B)	3477kg Est	3495kg Est	3477kg Est	3495kg Est	
Maximum User Payload (A-B)	1023kg	1005kg	1023kg	1005kg	
Unladen Weight	3312kg Est	3330kg Est	3312kg Est	3330kg Est	
Essential Habitation Equipment		01	kg		
Thermal Insulation Grade		THI	REE		
Front Double		194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"			
Rear Double		180cm x 143c	m / 5'11" x 4'8"		
Rear Nearside Single				·	
Rear Offside Single					
Drop Down Bed					

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 874 Standard	Kon-Tiki 874 Optional	Kon-Tiki 874 Optional	Kon-Tiki 874 Optional	
Dealer					
Lowdhams		Kon-Tiki 87	4 Grand Prix		
Roof Profile		Low Li	ne Pod		
Engine	160 MJT				
Engine Capacity		2.2	2ltr		
Max Power	160 HP @	3500rpm	180 HP @	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-k	(O Chassis		
Wheel base		4.70m / 0.8n	n - 15′5″ / 2′7″		
Designated Passenger Seats (excluding Driver)		4			
Berths (sleeping positions)		6			
Overall Length (no ladder)		8.96m/	29'5" Est		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.91cm	/ 9'6" Est		
Maximum Technical Permissible Laden Mass (A)		500	10kg		
Mass in Running Order (B)	3942kg Est	3960kg Est	3942kg Est	3960kg Est	
Maximum User Payload (A-B)	1058kg	1040kg	1058kg	1040kg	
Unladen Weight	3777kg Est	3795kg Est	3777kg Est	3795kg Est	
Essential Habitation Equipment		01	kg		
Thermal Insulation Grade		THI	REE		
Bed Sizes					
Front Double		194cm x 150cm / 136	cm / 6'4" x 4'11" / 4'6	11	
Rear Double		203cm x 183cm / 6'8" x 6'0"			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed		189cm x 150c	m / 6'2" x 4'11"		

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.

Model	Kon-Tiki 884 Standard	Kon-Tiki 884 Optional	Kon-Tiki 884 Optional	Kon-Tiki 884 Optional		
Dealer						
Lowdhams		Kon-Tiki 88	4 Grand Prix			
		,	,			
Roof Profile		Low Li	ne Pod			
Engine	160 MJT					
Engine Capacity		2.2	2ltr			
Max Power	160 HP@	3500rpm	180 HP @	3500rpm		
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm		
Chassis		Fiat / AL-k	(O Chassis			
Wheel base		4.70m / 0.8n	n - 15′5″ / 2′7″			
Designated Passenger Seats (excluding Driver)		3				
Berths (sleeping positions)			4			
Overall Length (no ladder)		8.96m/	29'5" Est			
Overall Width (mirrors folded)		2.38m	/ 7'10"			
Overall Height		2.92m /	9'7" Est			
Maximum Technical Permissible Laden Mass (A)		5000	kg Est			
Mass in Running Order (B)	3765kg Est	3783kg Est	3356kg Est	3783kg Est		
Maximum User Payload (A-B)	1235kg	1217kg	1644kg	1217kg		
Unladen Weight	3600kg Est	3618kg Est	3202kg Est	3618kg Est		
Essential Habitation Equipment		01	kg			
Thermal Insulation Grade		THI	REE			
Bed Sizes						
Front Double		194cm x 186cm / 150	lcm / 6'4" x 6'1" / 4'11	"		
Rear Double		206cm x 115cm / 6'9" x 3'9"				
Rear Nearside Single		195cm x 78cm / 6'5" x 2'7"				
Rear Offside Single		195cm x 78c	m / 6'5" x 2'7"			
Drop Down Bed						

NOTE: 1. The Maximum User Payload includes:

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.


Model	Kon-Tiki 894 Standard	Kon-Tiki 894 Optional	Kon-Tiki 894 Optional	Kon-Tiki 894 Optional	
Dealer					
Lowdhams		Kon-Tiki 89	4 Grand Prix		
			,		
Roof Profile		Low Li	ne Pod		
Engine	160 MJT	160 MJT Auto	180 MJT	180 MJT Auto	
Engine Capacity		2.2	2ltr		
Max Power	160 HP@	3500rpm	180 HP @	3500rpm	
Torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	
Chassis		Fiat / AL-k	(O Chassis		
Wheel base		4.70m / 0.8n	n - 15′5″ / 2′7″		
Designated Passenger Seats (excluding Driver)		3			
Berths (sleeping positions)			4		
Overall Length (no ladder)		8.96m/	29'5" Est		
Overall Width (mirrors folded)		2.38m	/ 7'10"		
Overall Height		2.92m /	9'7" Est		
Maximum Technical Permissible Laden Mass (A)		5000	kg Est		
Mass in Running Order (B)	3802kg Est	3820kg Est	3802kg Est	3820kg Est	
Maximum User Payload (A-B)	1198kg	1180kg	1198kg	1180kg	
Unladen Weight	3637kg Est	3655kg Est	3637kg Est	3655kg Est	
Essential Habitation Equipment		01	kg		
Thermal Insulation Grade		THI	REE		
Bed Sizes					
Front Double		194cm x 186cm / 150cm / 6'4" x 6'1" / 4'11"			
Rear Double		195cm x 143cm / 6'5" x 4'8"			
Rear Nearside Single					
Rear Offside Single					
Drop Down Bed					


NOTE : 1. The Maximum User Payload includes :

- a) the conventional load (this is the allowance for passengers)
- b) **essential habitation equipment** (items and fluids required for safe and proper functioning of habitation equipment)
- c) optional equipment (items available from the manufacturer over and above the standard specification)
- d) **personal effects** (those items not covered by the above)
- The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank and 1 x 6kg Calor Lite cylinder.
- The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
- 4. PLEASE TAKE CARE TO ENSURE THAT YOU HAVE ALLOWED FOR THE MASSES OF ALL ITEMS YOU INTEND TO CARRY IN THE MOTOR CARAVAN, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, s equipment etc.
- 5. WARNING UNDER NO CIRCUMSTANCES SHOULD THE MAXIMUM TECHNICAL PERMISSIBLE LADEN MASS OF THIS MOTOR CARAVAN BE EXCEEDED.


Edge bed make up


Bed make up in Edge 476 front bed






Bed make up in Edge 476 rear bed






Edge bed make up

Bed make up in Edge 486 Rear bed

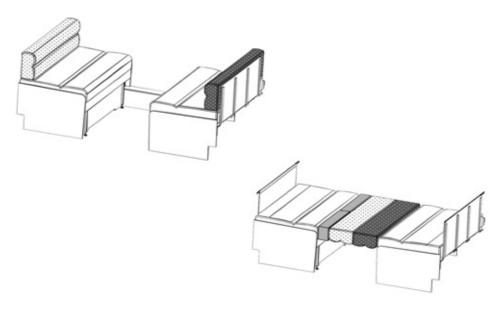


Bed make up in Edge 466 & 486 front bed

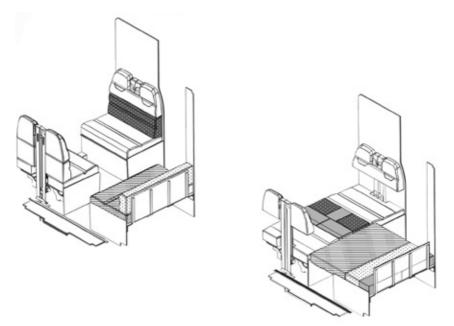


Edge and Select Compact bed make up

Bed make up in Edge 464 and 494 front bed

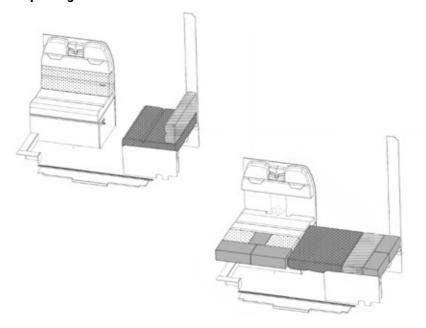


Select Compact bed make up

Bed make up in Select Compact C404 & C500 rear bed

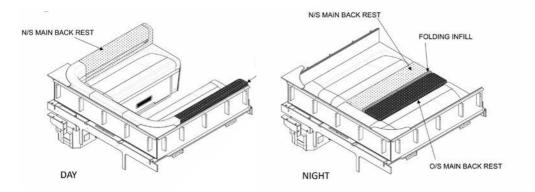


Escape and Kon-Tiki bed make up


Bed make up in Escape 674 and Kon-Tiki 774 front bed

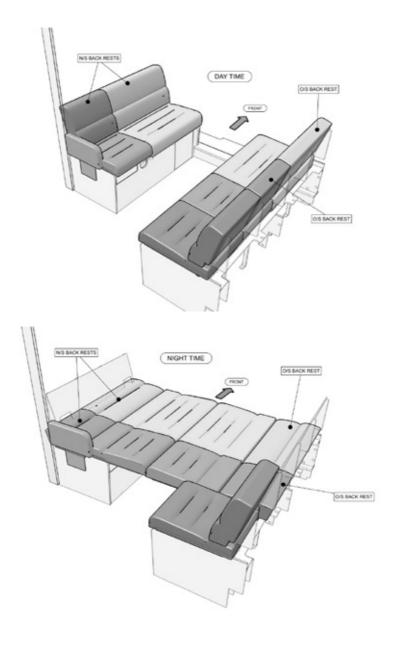

Escape and Kon-Tiki bed make up


Bed make up in Escape 674 and Kon-Tiki 774 rear bed






Escape and Kon-Tiki bed make up

Bed make up in Escape 640, 664, 684 and 694 front bed Bed make up Kon-Tiki 764, 784, 794, 884 and 894 front bed

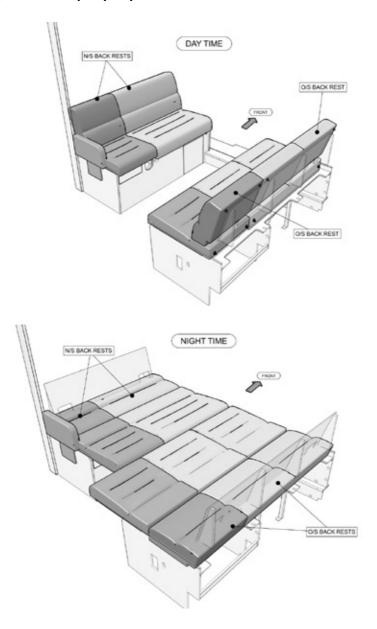


Kon-Tiki bed make up

Bed make up in Kon-Tiki 984 and 994 front bed

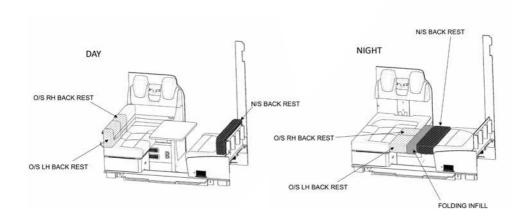

Bed make up in Kon-Tiki 984 rear bed

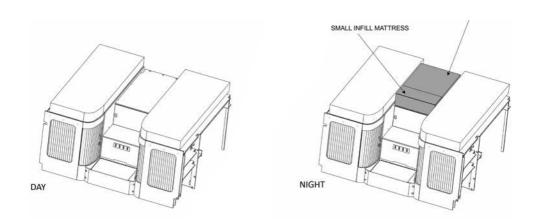







SWIFT GROUP

Dunswell Road Cottingham East Yorkshire HU16 4JX

Tel: 01482 875740 **Fax:** 01482 840082

Customer Experience Team

enquiries@swiftleisure.co.uk

FIND OUT MORE AT **SWIFTGROUP.CO.UK**









