



SWIFT

CREATING SMILES FOR LIFE

love life




LOVE SWIFT

**love
Kon-Tiki**

TECHNICAL
SPECIFICATION


764

774

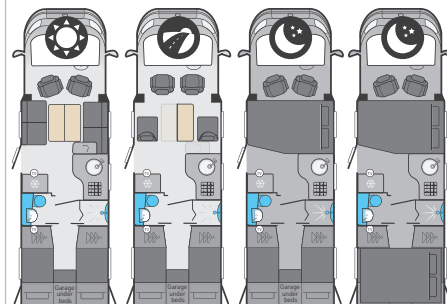784


	Standard	Optional	Optional	Optional	Standard	Optional	Optional	Optional	Standard	Optional	Optional	Optional
Fiat MultiJet diesel engine	160	160 Auto	180	180 Auto	160	160 Auto	180	180 Auto	160	160 Auto	180	180 Auto
Engine capacity	2.2ltr				2.2ltr				2.2ltr			
Engine power	160 HP @ 3500rpm		180 HP @ 3500rpm		160 HP @ 3500rpm		180 HP @ 3500rpm		160 HP @ 3500rpm		180 HP @ 3500rpm	
Engine torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm
Wheel base	4.30m / 14'1"				4.70m / 15'5"				4.70m / 15'5"			
Seat belts (inc. driver)	4				5				4			
Berths (sleeping positions)	4				6				4			
Overall length	7.84m / 25'9"				8.22m / 27'0"				7.84m / 25'9"			
Overall body width (mirrors folded)	2.38m / 7'10"				2.38m / 7'10"				2.38m / 7'10"			
Overall height	2.89m / 9'6"				2.87m / 9'5"				2.89m / 9'6"			
Standard awning	Thule 4200 4.5m				Thule 4200 4.5m				Thule 4200 4.5m			
Maximum technical permissible laden mass (A)	4500kg				4500kg				4500kg			
Mass in running order (B)	3155kg Est	3173kg Est	3155kg Est	3173kg Est	3503kg Est	3521kg Est	3503kg Est	3521kg Est	3356kg Est	3374kg Est	3356kg Est	3374kg Est
Maximum user payload (A-B)	1345kg Est	1327kg Est	1345kg Est	1327kg Est	997kg Est	979kg Est	997kg Est	979kg Est	1144kg Est	1126kg Est	1144kg Est	1126kg Est
Thermal insulation grade	THREE				THREE				THREE			
Maximum trailer weight	2000kg#				2000kg#				2000kg#			
Gross train weight	6000kg#				6000kg#				6000kg#			
BED SIZES												
Front double	194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"				194cm x 136cm / 6'4" x 4'6"				194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"			
Rear double	188cm x 129cm / 6'2" x 4'3"				203cm x 132cm / 6'8" x 4'4"				206cm x 115cm / 6'9" x 3'9"			
Rear nearside single									195cm x 78cm / 6'5" x 2'7"			
Rear offside single									195cm x 78cm / 6'5" x 2'7"			
Drop down bed					189cm x 150cm / 6'2" x 4'11"							




794



874



884

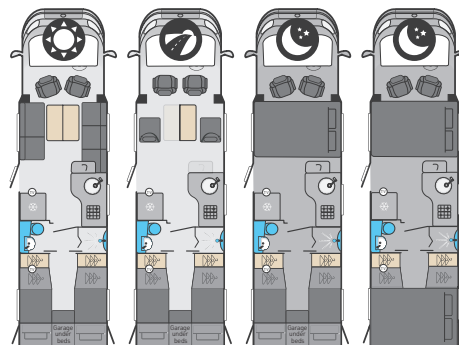


Standard	Optional	Optional	Optional	Standard	Optional	Optional	Optional	Standard	Optional	Optional	Optional
160	160 Auto	180	180 Auto	160	160 Auto	180	180 Auto	160	160 Auto	180	180 Auto
2.2ltr				2.2ltr				2.2ltr			
160 HP @ 3500rpm		180 HP @ 3500rpm		160 HP @ 3500rpm		180 HP @ 3500rpm		160 HP @ 3500rpm		180 HP @ 3500rpm	
380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm
4.70m / 15'5"				4.70m / 15'5"				4.70m / 15'5"			
4				5				4			
4				6				4			
7.84m / 25'9"				8.96m / 29'5" Est				8.96m / 29'5" Est			
2.38m / 7'10"				2.38m / 7'10"				2.38m / 7'10"			
2.89m / 9'6"				2.91cm / 9'6" Est				2.92m / 9'7" Est			
Thule 4200 4.5m				Thule 4200 4.5m				Thule 4200 4.5m			
4500kg				5000kg				5000kg			
3409kg Est	3427kg Est	3409kg Est	3427kg Est	3503kg Est	3521kg Est	3503kg Est	3521kg Est	3356kg Est	3374kg Est	3356kg Est	3374kg Est
1091kg Est	1073kg Est	1091kg Est	1073kg Est	1497kg Est	1479kg Est	1497kg Est	1479kg Est	1644kg Est	1626kg Est	1644kg Est	1626kg Est
THREE				THREE				THREE			
2000kg#				2000kg#				2000kg#			
6000kg#				6000kg#				6000kg#			
194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"				194cm x 150cm / 136cm / 6'4" x 4'11" / 4'6"				194cm x 186cm / 150cm / 6'4" x 6'1" / 4'11"			
180cm x 143cm / 5'11" x 4'8"				203cm x 183cm / 6'8" x 6'0"				206cm x 115cm / 6'9" x 3'9"			
								195cm x 78cm / 6'5" x 2'7"			
								195cm x 78cm / 6'5" x 2'7"			
				189cm x 150cm / 6'2" x 4'11"							

CONTINUED...

KON-TIKI SPECIFICATION CONTINUED...



894



	Standard	Optional	Optional	Optional
Fiat MultiJet diesel engine	160	160 Auto	180	180 Auto
Engine capacity	2.2ltr			
Engine power	160 HP @ 3500rpm		180 HP @ 3500rpm	
Engine torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm
Wheel base	4.70m / 15'5"			
Seat belts (inc. driver)	4			
Berths (sleeping positions)	4			
Overall length	8.96m / 29'5" Est			
Overall body width (mirrors folded)	2.38m / 7'10"			
Overall height	2.92m / 9'7" Est			
Standard awning	Thule 4200 4.5m			
Maximum technical permissible laden mass (A)	5000kg			
Mass in running order (B)	3409kg Est	3427kg Est	3409kg Est	3427kg Est
Maximum user payload (A-B)	1591kg Est	1573kg Est	1591kg Est	1573kg Est
Thermal insulation grade	THREE			
Maximum trailer weight	2000kg#			
Gross train weight	6000kg#			
BED SIZES				
Front double	194cm x 186cm / 150cm / 6'4" x 6'1" / 4'11"			
Rear double	195cm x 143cm / 6'5" x 4'8"			
Rear nearside single				
Rear offside single				
Drop down bed				

KON-TIKI OPTIONAL EXTRAS

FACTORY FIT

The following weights are for optional extras fitted at the time of manufacture of the motorhome (subject to availability).

WEIGHT

Detachable homologated tow bar* and electrics

40kg

DEALER FIT

WEIGHT

Thule Elite G2 two cycle rack** (except 774/874)

10.1kg

Swift Command Tracker by Sargent annual subscription

-

Notes:

- * Please note that the additional weight of the tow bar and trailer nose weight increases the rear axle loading of the motorhome so care should be taken that the rear axle load is not exceeded when towing. To ensure adequate road holding, the load on the front axle, under all conditions, must not be less than 40% or more than 70% of the total weight. Care must be taken when distributing loads. Please see the Technical Handbook for permissible axle loads, the loadings and weights stated are maximums and must not be exceeded under any circumstances
- ** Dependent on model, visibility through rear camera may be reduced when bicycles are carried on the optional bike carrier
- # The maximum trailer weight is limited by the gross train weight which must not be exceeded. For example if the vehicle is at the maximum MTPLM of 4500kg, then the maximum trailer weight possible is 1500kg. Reducing the weight of the vehicle by removing payload, will allow you to increase the trailer weight up to a maximum of 2000kg.
- Est Estimate





SWIFT

CREATING SMILES FOR LIFE

GENERAL TECHNICAL NOTES

1. The Maximum User Payload includes:
 - a) the conventional load (this is the allowance for passengers)
 - b) essential habitation equipment (items and fluids required for safe and proper functioning of habitation equipment)
 - c) optional equipment (items available from the manufacturer over and above the standard specification)
 - d) personal effects (those items not covered by the above)
2. The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank capacity and 1 x 6kg Calor Lite LPG cylinder. The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
3. Please take care to ensure that you have allowed for the masses of all items you intend to carry in the motorhome, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, sports equipment etc.
4. Warning - under no circumstances should the maximum technical permissible laden mass of this motorhome be exceeded.

DISCLAIMER

This brochure does not constitute an offer by Swift Group Limited (Swift). Swift reserves the right to alter specifications at any time as materials and conditions demand. Distributors and dealers sell Swift products on their own account and not as agents of Swift. Accordingly, they have no authority to bind Swift or to make any representation or undertaking whatsoever on behalf of Swift. Issued September 2021.

VISIT [SWIFTGROUP.CO.UK](https://www.swiftgroup.co.uk) TO...



Configure your model



Watch videos



Download brochure



Find a dealer

FOLLOW THE SWIFT FAMILY

