



Touring Caravans



Touring Caravans

Challenger Sport Eccles Sport

Specification, Wiring Diagrams & Bulb Chart

SWIFT GROUP

Dunswell Road, Cottingham, East Yorkshire, HU16 4JX.


Tel: 01482 875740 Fax: 01482 840082

email: enquiry@swiftgroup.co.uk

website: www.swiftgroup.co.uk

A MEMBER OF THE SWIFT GROUP

1094802 issued July 2011

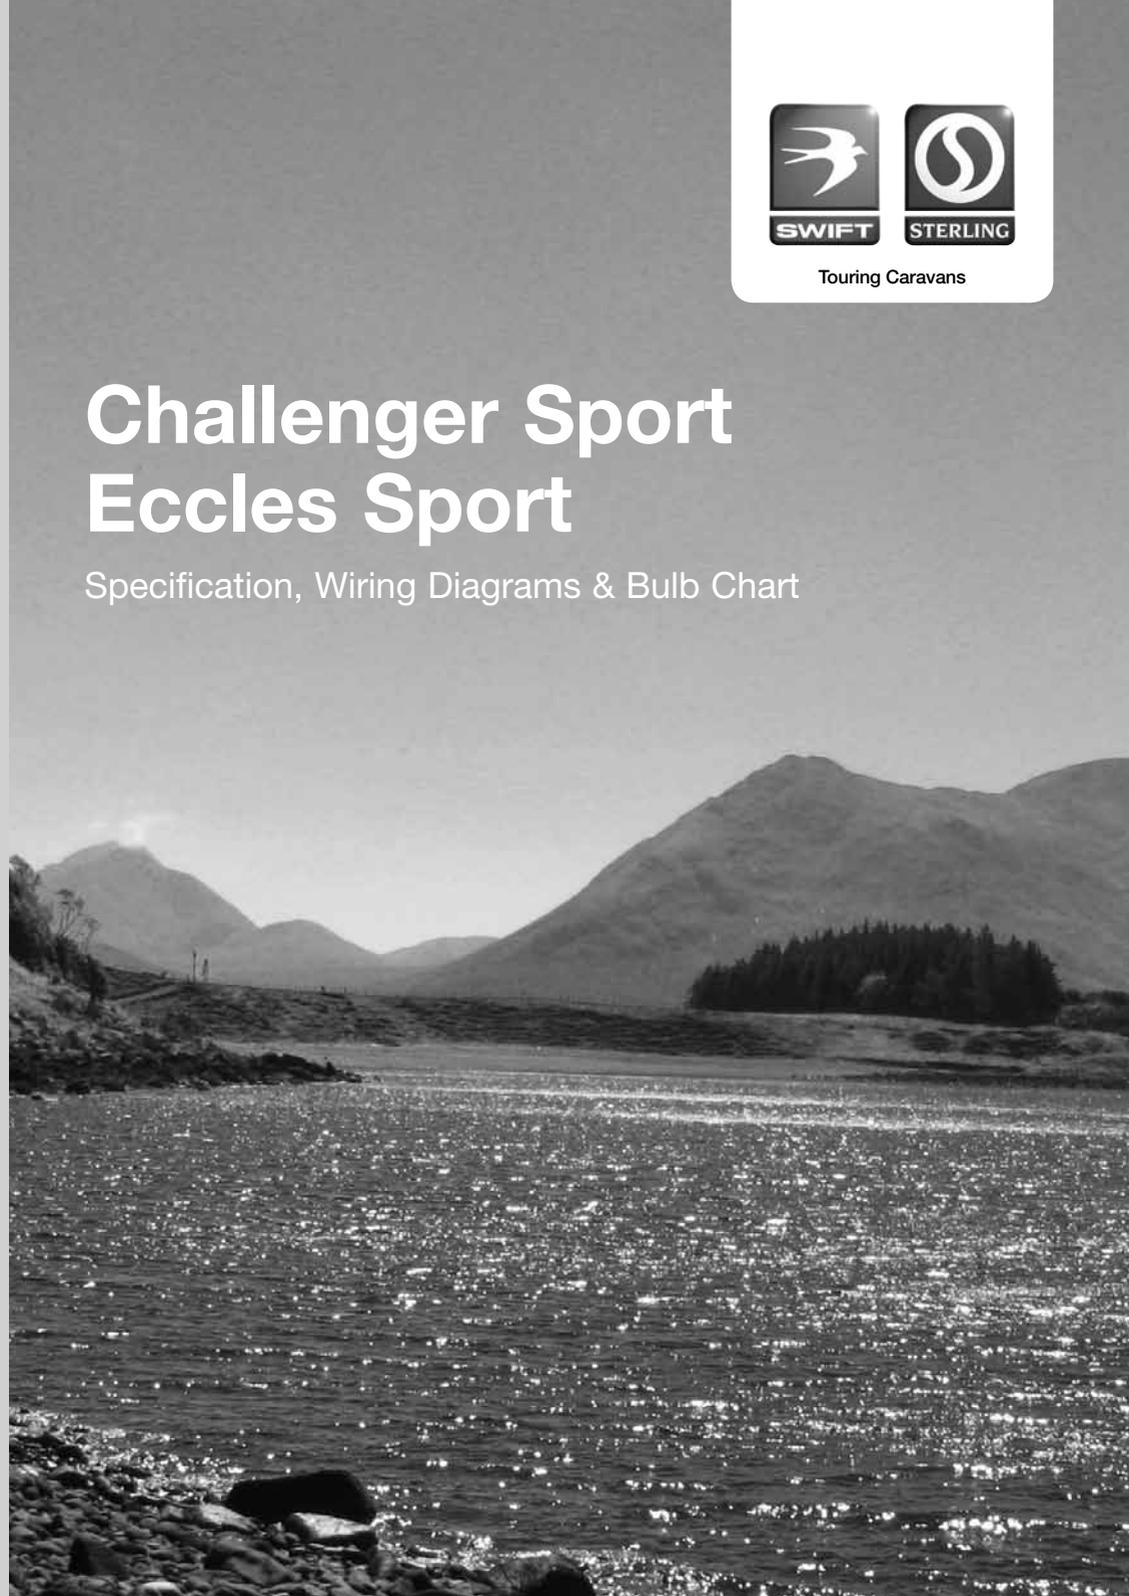

Contents

Specification.....	3
Wiring Diagrams - Road Lighting.....	5
Wiring Diagrams - Roof Circuits	6
Wiring Diagrams - Floor Circuits.....	7
Wiring Diagrams - 230v Circuits	8
Wiring Diagrams - Power Circuits.....	9
Wiring Diagrams - 13 pin Socket.....	10
Wiring Diagrams - Cable Colours	11
Bulb Chart	12
Bulb Replacement.....	13

Specification

Challenger Sport	382	442	514
Eccles Sport	382	442	514
Berths	2	2	4
Axles	1	1	1
Internal Length (bed box height)	3.72m/12'2"	4.40m/14'5"	5.23m/17'2"
Overall Width	2.25m/7'5"	2.25m/7'5"	2.25m/7'5"
Overall Height (inc. TV Aerial)*	2.64m/8'8"	2.64m/8'8"	2.65m/8'8"
Maximum Internal Headroom	1.95m/6'5"	1.95m/6'5"	1.95m/6'5"
Overall Length	5.37m/17'7"	6.06m/19'11"	6.88m/22'7"
Awning A/A dimension†	8.11m/26'7"	8.79m/28'10"	9.62m/31'7"
Mass in Running Order (inc. tolerance)	1028kg/20.2cwt	1114kg/21.9cwt	1230kg/24.2cwt
Maximum Technical Permissible Laden Mass (Lower limit)	1143kg/22.5cwt	1235kg/24.3cwt	1380kg/27.2cwt
Maximum Technical Permissible Laden Mass (Upper limit)	1200kg/23.6cwt	1350kg/26.6cwt	1500kg/29.5cwt
Total user Payload	115kg/2.3cwt	121kg/2.4cwt	150kg/3.0cwt
Personal Effects	115kg/2.3cwt	121kg/2.4cwt	150kg/3.0cwt
Options	0kg/0cwt	0kg/0cwt	0kg/0cwt
Tyre Size	175 R14C 99Q	175 R14C 99Q	185 R14C 102Q
Tyre pressure at Lower limit MTPLM	3.5 bar / 51 psi	3.9 bar / 57 psi	4.0 bar / 58 psi
Tyre pressure at Upper limit MTPLM	3.7 bar / 54 psi	4.3 bar / 62 psi	4.4 bar / 64 psi
Static Load on Coupling Head	100kg	100kg	100kg
Thermal Insulation Grade	THREE	THREE	THREE
Bed Sizes			
Front Double	208cm x 180cm/6'10" x 5'11"	208cm x 180cm/6'10" x 5'11"	208cm x 159cm/6'10" x 5'3"
or Front Nearside Single	190cm x 72cm/6'3" x 2'4"	190cm x 72cm/6'3" x 2'4"	
and Front Offside Single	180cm x 72cm/5'11" x 2'4"	180cm x 72cm/5'11" x 2'4"	
Rear Double			196cm x 131cm/6'5" x 4'4"
Rear Bunk			
Side Single (offside)			
Side Single (nearside)			
Side Bunk (offside)			
Side Bunk (nearside)			
Rear Fixed Lower Bunk			
Rear Fixed Mid Bunk			
Rear Fixed Upper Bunk			
Side Fixed Lower Bunk			
Side Fixed Mid Bunk			
Side Fixed Upper Bunk			

Weights: From the 2011 season the method of calculating the Mass in Running Order (MRO) and user payload figures has changed in order to bring it in line with European Vehicle Directives.

Allowances for essential equipment (e.g. gas cylinders) previously allowed for in the user payload are now contained within the MRO. A provision for a leisure battery which used to be within the essential

equipment payload has now been included within the personal effects payload allowance.

Although the method of calculation has changed, the overall effect is that the amount of payload available to the customer has remained the same, it is just calculated in a different manner

Bed Sizes : Please note that the front double bed sizes quoted are for seating configurations without chest of drawers. The front double bed width for a layout with a chest of drawers fitted will be reduced by 0.4m(1'4") from that stated.

524	544	554	586	636
524	544	554	586	636
4	4	4	6	6
1	1	1	1	2
5.29m/17'4"	5.60m/18'4"	5.60m/18'4"	5.83m/19'2"	6.27m/20'7"
2.25m/7'5"	2.25m/7'5"	2.25m/7'5"	2.25m/7'5"	2.25m/7'5"
2.65m/8'8"	2.65m/8'8"	2.65m/8'8"	2.65m/8'8"	2.62m/8'7"
1.95m/6'5"	1.95m/6'5"	1.95m/6'5"	1.95m/6'5"	1.95m/6'5"
6.94m/22'9"	7.25m/23'9"	7.25m/23'9"	7.48m/24'6"	7.93m/26'0"
9.68m/31'9"	9.99m/32'9"	9.99m/32'9"	10.22m/33'6"	10.66m/35'0"
1255kg/24.7cwt	1282kg/25.2cwt	1277kg/25.1cwt	1371kg/27.0cwt	1470kg/28.9cwt
1405kg/27.7cwt	1435kg/28.2cwt	1430kg/28.1cwt	1547kg/30.5cwt	1650kg/32.5cwt
1500kg/29.5cwt	1500kg/29.5cwt	1500kg/29.5cwt	1600kg/31.5cwt	1800kg/35.4cwt
150kg/3.0cwt	153kg/3.0cwt	153kg/3.0cwt	176kg/3.5cwt	180kg/3.5cwt
150kg/3.0cwt	153kg/3.0cwt	153kg/3.0cwt	176kg/3.5cwt	180kg/3.5cwt
0kg/0cwt	0kg/0cwt	0kg/0cwt	0kg/0cwt	0kg/0cwt
185 R14C 102Q	185 R14C 102Q	185 R14C 102Q	195/70 R15C 104R	175/65 R14 86T
4.0 bar / 58 psi	4.1 bar / 59 psi	4.1 bar / 59 psi	4.2 bar / 61 psi	2.4 bar / 35 psi
4.4 bar / 64 psi	4.4 bar / 64 psi	4.4 bar / 64 psi	4.4 bar / 64 psi	2.7 bar / 39 psi
100kg	100kg	100kg	100kg	100kg
THREE	THREE	THREE	THREE	THREE
208cm x 180cm/6'10" x 5'11"	208cm x 159cm/6'10" x 5'3"	208cm x 159cm/6'10" x 5'3"	208cm x 180cm/6'10" x 5'11"	208cm x 180cm/6'10" x 5'11"
180cm x 72cm/5'11" x 2'4"			190cm x 72cm/6'3" x 2'4"	180cm x 72cm/5'11" x 2'4"
190cm x 72cm/6'3" x 2'4"			180cm x 72m/5'11" x 2'4"	190cm x 72cm/6'3" x 2'4"
	194cm x 132cm/6'4" x 4'4"	189cm x 133cm/6'2" x 4'4"		
180cm x 62cm/5'11" x 2'0"			180cm x 67cm/5'11" x 2'2"	180cm x 92cm/5'11" x 3'0"
176cm x 59cm/5'9" x 1'11"			176cm x 59cm/5'9" x 1'11"	
			182cm x 57cm/6'0" x 1'10"	183cm x 56cm/6'0" x 1'10"
				183cm x 57cm/6'0" x 1'10"
			182cm x 57cm/6'0" x 1'10"	183cm x 56cm/6'0" x 1'10"

Awning sizes: Due to varying awning designs and sizes the awning sizes given are approximate only. Specific awning sizes must be confirmed by your dealer or awning manufacturer prior to purchase.


* The dimensions given are approximate due to slight variations in suspension ride heights, loading conditions and tyre pressures.

Customers should verify the actual dimensions of their touring caravan before committing to anything that could be impacted by these dimensions


Please note: Any dealer fit options will reduce the overall payload available to the user of the caravan.

If you require additional payload it is possible to upgrade the MTPLM to the upper limit. Please contact your Swift caravan dealer for more information.


Challenger Sport/Eccles Sport - Road lighting

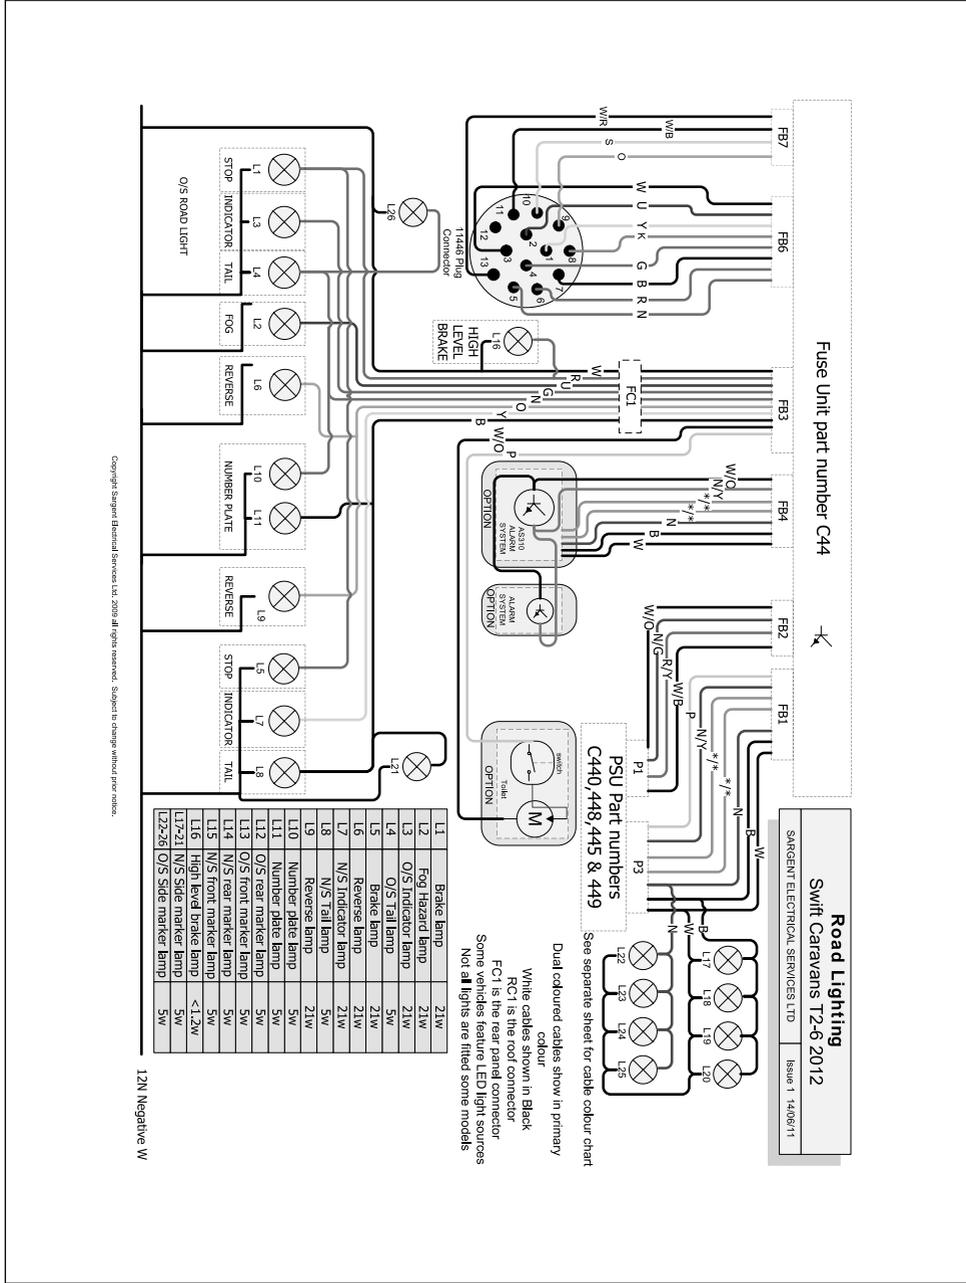


Challenger Sport/Eccles Sport - Floor circuits

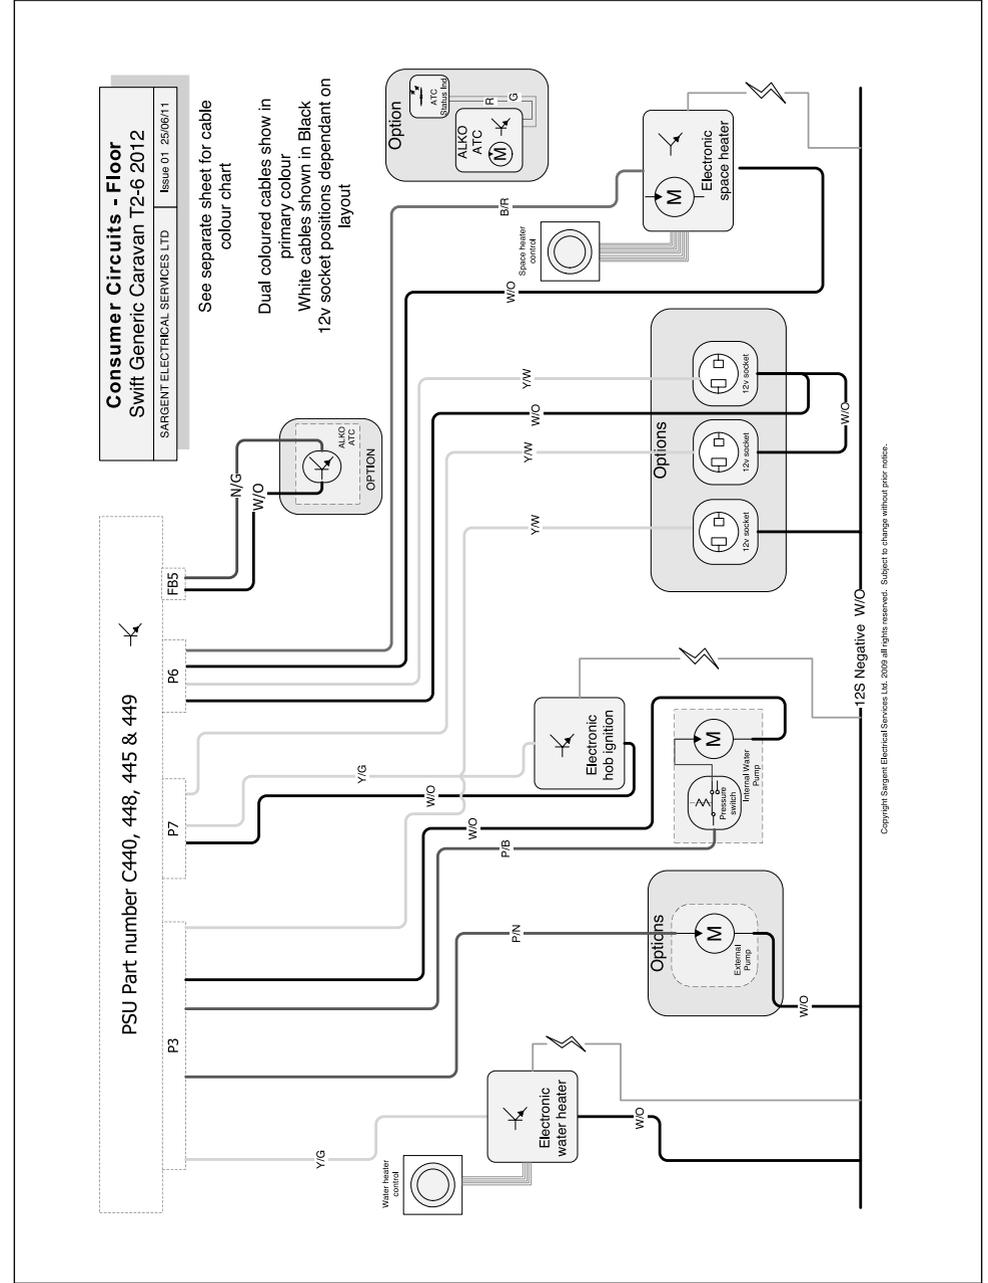


Challenger Sport/Eccles Sport - Roof circuits

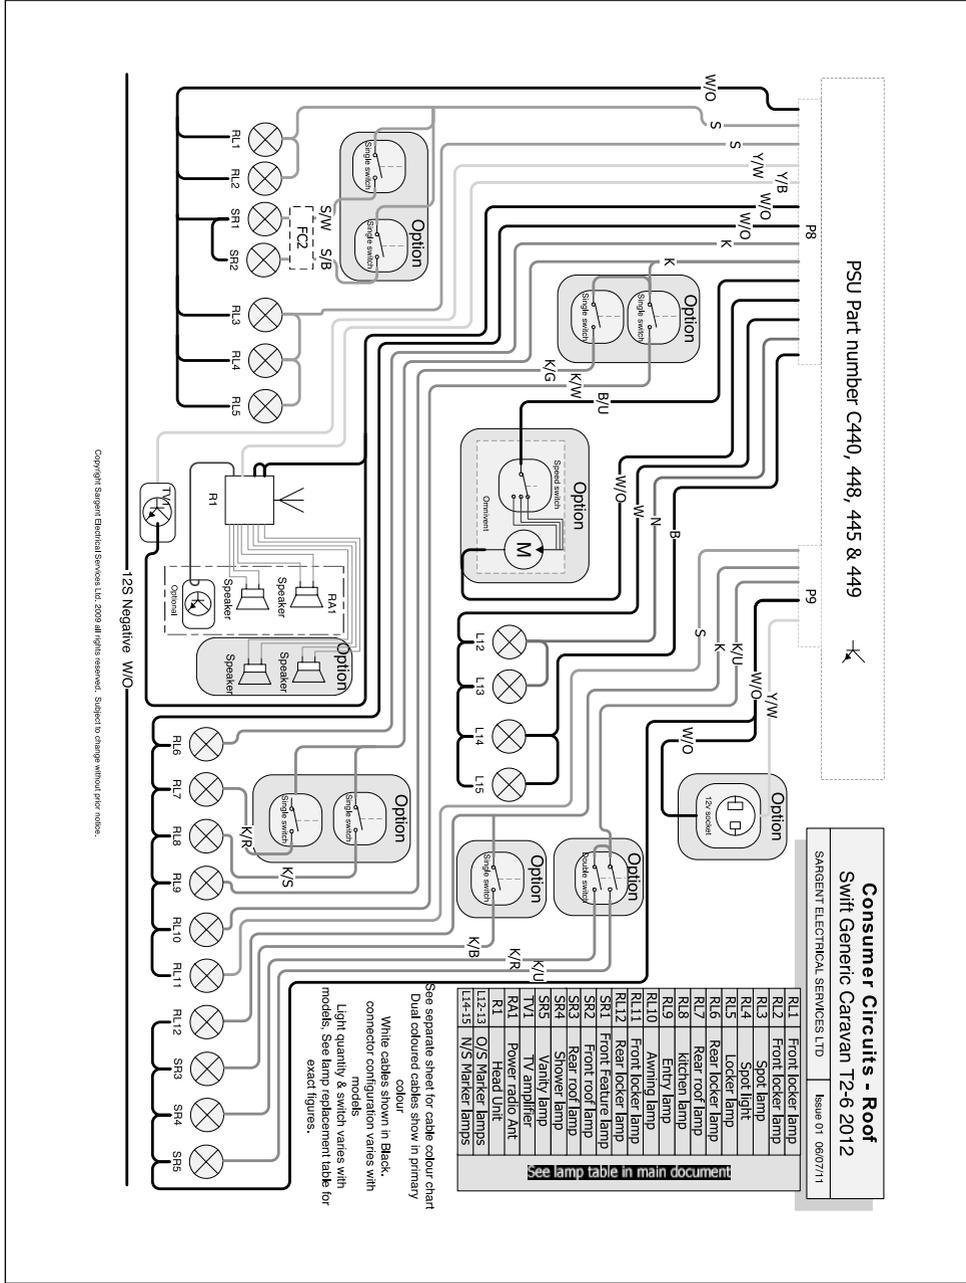


Challenger Sport/Eccles Sport - Power circuits

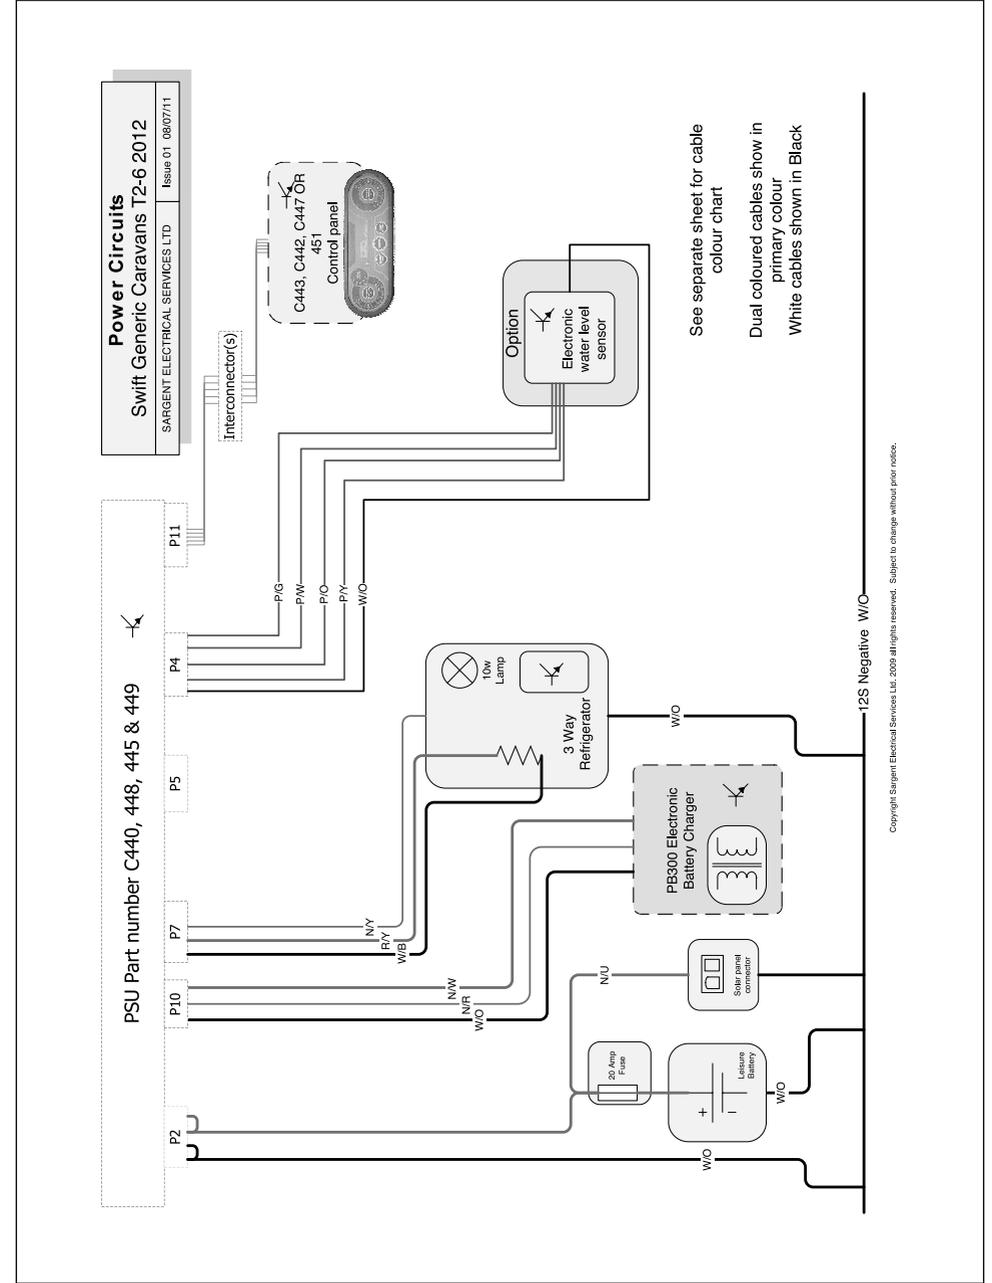

Challenger Sport/Eccles Sport - 230V circuits

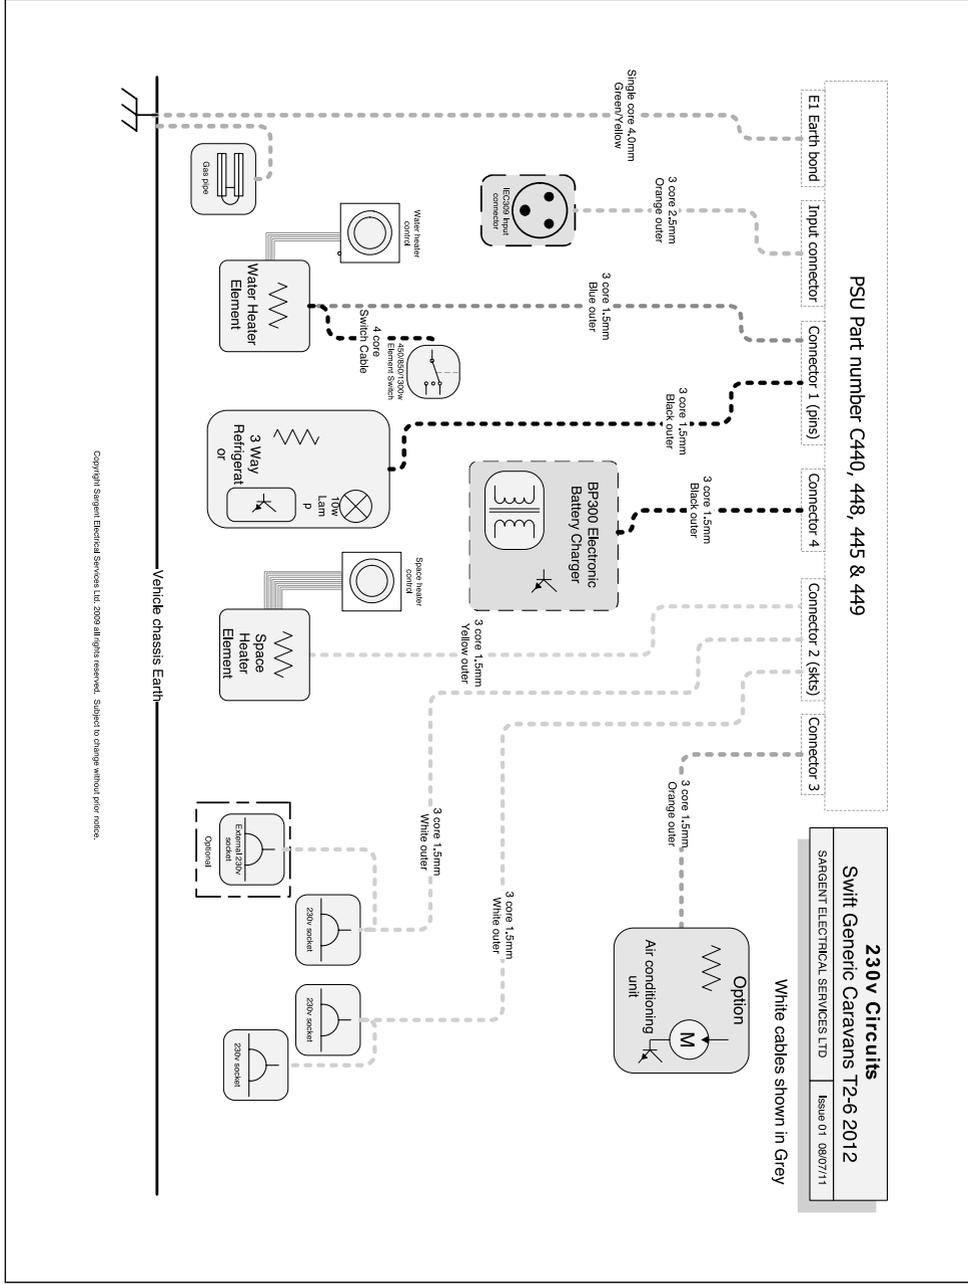

Challenger Sport/Eccles Sport - 13 pin socket

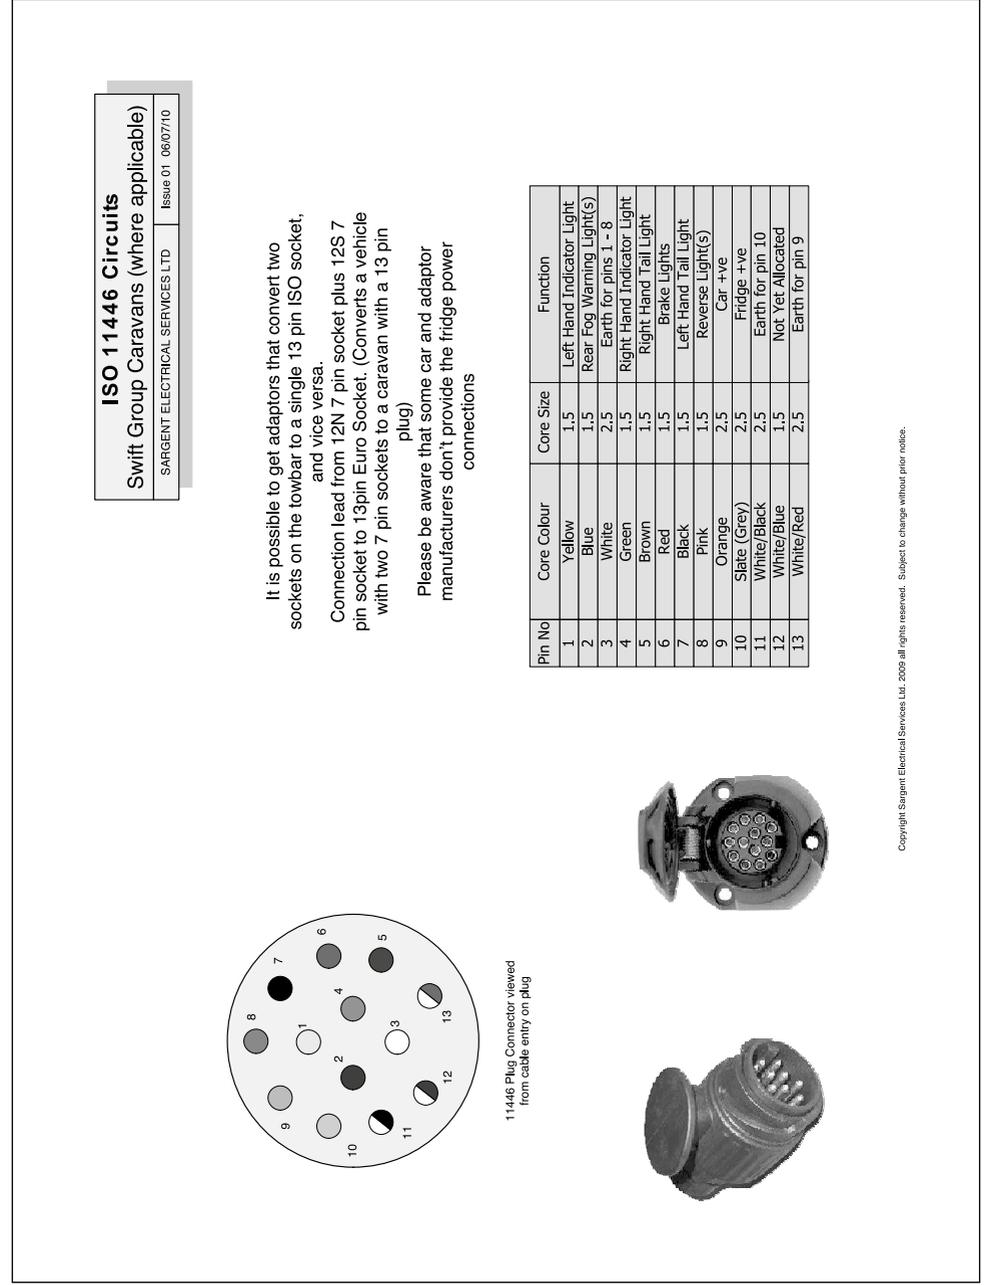

Challenger Sport/Eccles Sport - Cable Colour Chart

12v Cable Colours

B	BLACK
N	BROWN
R	RED
O	ORANGE
Y	YELLOW
G	GREEN
U	BLUE
P	PURPLE
S	SLATE GREY
W	WHITE
K	PINK

Example



Y/U Yellow cable with Blue stripe

230v Cable Colours

B	BLACK
N	BROWN
W	WHITE
O	ORANGE
Y	YELLOW
G	GREEN
U	BLUE

Cable Colour Chart
Swift range 2011
SARGENT ELECTRICAL SERVICES LTD
Issue 08/07/10

Exterior Lights	Bulb type	Bulb rating
Front marker lights	W5W	12v 5W
Side marker - Low Level	W5W	12v 5W
Side marker - High Level	R5W	12v 5W
Reversing light	P21	12v 21W
Rear indicator light	P21	12v 21W
Brake / tail light	P21/5W	12v 21W/5W
Fog light	P21	12v 21W
Number plate light	C5W	12v 5W
High level brake light	T5/13.5	12v 2.3w
Interior / Other Lights	Bulb type	Bulb rating
Awning lights	Astro 500mm LED complete unit	12v 20W
Ceiling light, triple LED (Kitchen area)	FEM0858 complete lamp	12v LED
Ceiling light, halogen (Bathroom area)	Halogen capsule bulb	12v 10W
Ceiling light, halogen (White, shower area)	Halogen capsule bulb	12v 10W
Locker spotlights, LED	FEM0854 complete lamp	12v LED
Downlighters, LED	FEM0855 (Silver), FEM0856 (Nickel) complete lamp	12v LED
Kitchen light	F2557 complete lamp, flush mount	12v CCFL
Over locker lighting	Fluorescent 300mm	12v 8W
Over locker lighting	Fluorescent 525mm	12v 13W
Feature light over front seating	FEM0803 complete lamp	12v LED

Note: Not all bulbs and lights feature on all models within a range

Bulb Replacement

CHALLENGER SPORT/ ECCLES SPORT ROAD LIGHT BULB ACCESS

STOP / TAIL / INDICATOR AND REVERSE LAMPS

- Bulb access is from front / via lense of each lamp
- Remove 2x screws from each light lense and withdraw lense
- Bulbs are a bayonet fitting – apply slight pressure on bulb towards light fitting, and twist to release
- Reverse procedure to re-fit bulb and lense.
- Take care when replacing stop/tail lamp bulb, that orientation of bulb is correct – to check, brake light operation should be brighter than tail lamp operation.

REAR CENTRAL FOG LIGHT

- Bulb access is from front / via lense of lamp
- Remove 2x screws from light lense and withdraw lense
- Bulb is a bayonet fitting – apply slight pressure on bulb towards light fitting, and twist to release
- Reverse procedure to re-fit bulb and lense.

UPPER REAR SIDE POSITION LAMPS (RED / CLEAR LENSE)

- Lense is removed from base to access bulb
- Carefully insert small flat bladed screwdriver into recess in lower edge of lamp base. Apply pressure to release locking barb.
- Lift lense upwards and away from lamp base, lower edge first
- Lever bulb out of retaining clips
- Reverse procedure to re-fit bulb and lense

HIGH LEVEL BRAKE LAMP

- Remove 2x screw cover caps from front face of lamp using small flat bladed screwdriver.
- Remove screws at either end of lamp, and withdraw whole fitting away from rear panel of caravan
- Disconnect lamp from harness
- Re-connect new lamp to harness, and secure lamp to caravan body with 2x screws
- Lamp retaining screws are fixed into a rubber sleeve with a threaded insert, often known as a rawlnut. If lamp has been removed / re-fitted several times the rubber sleeve may need replacing, these are available through your dealer

NUMBER PLATE LAMPS

- Bulb access is from the front / via lense of each lamp
- Remove the two screws in the lense of the lamp
- Lever the bulb out of retaining clips
- Reverse the procedure to re-fit a new bulb and the light lense

FRONT MARKER POSITION LAMPS

- Bulb access is from rear of lamp
- Remove 2x screws from light fitting, and withdraw whole fitting from caravan front panel
- Harness plugs into bulb holder – Twist bulb holder relative to lamp body to release bulb holder from lamp body
- Bulbs are push fit into bulb holder – pull bulb directly away from holder to release
- Reverse procedure to replace bulb in holder, holder in lamp and lamp onto caravan body.

SIDE MARKER POSITION LAMPS

- Bulb access is from rear of lamp. First check from within caravan if the rear of the lamp is accessible:
- If rear of light is accessible:
- Harness plugs into bulb holder – Twist bulb holder relative to lamp body to release bulb holder from lamp body
- Bulbs are push fit into bulb holder – pull bulb directly away from holder to release
- Reverse procedure to replace bulb in holder and holder in lamp
- If rear of light is not accessible:
- Remove 2x screws from light fitting, and withdraw whole fitting from caravan body
- Harness plugs into bulb holder – Twist bulb holder relative to lamp body to release bulb holder from lamp body
- Bulbs are push fit into bulb holder – pull bulb directly away from holder to release
- Reverse procedure to replace bulb in holder, holder in lamp and lamp onto caravan body